



SPRAY NOZZLES FOR INDUSTRIAL APPLICATIONS



**AIR ASSISTED
ATOMIZERS**



PNR ITALIA

SPRAY NOZZLES FOR INDUSTRIAL APPLICATIONS

PNR ITALIA manufactures and markets small spraying nozzles for individual use up to spraying systems for large industrial plants and is able to meet every customer's need with targeted solutions.

The wide range of products includes spray nozzles, washing heads and complementary accessories such as filters, guns and hoses for industrial washing, ejectors, blow nozzles, joints and hose clamps.

Located in Voghera, not far from Milan, the Headquarter and production plant is located in a strategic area favored by the proximity to the main motorway networks and important international maritime routes, easily accessible from the port of Genoa.

PNR ITALIA started its activity in 1968 with the trade and production of components and spraying nozzles for fire protection systems and, subsequently, with a range of sprayers for industrial applications. Over time it has grown and consolidated through a commercial policy based on a widespread network of partners present in the main foreign markets and also thanks to a continuous investment in research.

Today PNR ITALIA has at its disposal a technologically advanced production plant for the production of spraying nozzles, washing heads and atomizers with absolute quality machines, many of which work with CNC technology, often internally designed for special machining.

With an annual production of about 9 million pieces, PNR ITALIA is a solid industrial reality oriented to constant growth, driven by high-tech investments and product innovation.




CONTENT

| | |
|----|-----------------------------------|
| 2 | INTRODUCTION |
| 4 | ULTRASONIC ATOMIZERS |
| 6 | CLASSIC ATOMIZERS |
| 10 | AIR ACTUATED ATOMIZERS |
| 11 | PRESSURE ATOMIZERS - INTERNAL MIX |
| 14 | SIPHON ATOMIZERS |
| 15 | PRESSURE ATOMIZERS - EXTERNAL MIX |
| 21 | LARGE SIZE ATOMIZERS |
| 24 | OPTIONS AND ACCESSORIES |
| 26 | SPECIAL ATOMIZERS |
| 27 | HYDRAULIC ATOMIZERS |
| 28 | GENERAL INFORMATION |



*PNR Italia Headquarters
Voghera (PV)*



INTRODUCTION

AIR ASSISTED ATOMIZING

Several industrial processes need the atomizing of liquids into fine and very fine droplets. This result might be achieved by means of a purely hydraulic nozzle, with the liquid being fed at high pressure through a very small orifice, but the process would originate two main problems:

- Requiring costly investments and complicated lay-out.
- Originating plugging problems because of the small orifice dimensions.

In the majority of industrial processes a fine liquid atomization is obtained by means of air assisted atomizers, where compressed air supplies the required energy to break the liquid and to throw the droplets at a given distance from the atomizer. An air atomizing system has however two inherent limitations:

- The narrow inside passages require adequate filtering of air and liquid.
- The high speed jet will only produce narrow angle sprays. To overcome this inconvenience multiple orifice atomizers are used to produce a diverging sprays with better droplet distribution.

AIR ASSISTED ATOMIZERS

The first two sections of the Catalog show two types of atomizers largely used in the industry, the third one deals with complete atomizing systems.

ULTRASONIC ATOMIZERS

These devices provide liquid atomization in two steps:

- The liquid is injected into the nozzle center and is first atomized by shear action and then mixed with the high speed air stream leaving the nozzle through the outlet orifice.
- The stream carrying the droplets is taken to impact onto a resonator placed in front of the nozzle orifice, and generates a field of sound waves for additional droplet breakup.

Ultrasonic atomizers produce very fine droplets, in a tight dimensional range, and supply low capacities below 100 liters per hour.

Their operation produces a typical noise, the level of which needs to be checked according to the local regulations if some personnel is supposed to work in a nearby area.

CLASSIC ATOMIZERS

These devices produce liquid atomization by simple shear action, providing a high velocity stream to impact onto a liquid flow. In spite of their inherent low efficiency, and because of the low capacities involved, classic atomizers are the most convenient solution for most of the current applications. A wide range of spray patterns, capacities, atomizer types, body options and accessories has been developed to suit many different requirements from the industry.

PNR MATERIAL CODES

Many products in this Catalog are available in different materials, and therefore the product codes carry often two letters (XX) which need to be replaced from the required material code. A list with the most used codes is given in the following.

| | | |
|---------------------------------------|--|--|
| A1 Mild steel | D3 Polyamide (PA) | L1 Monel 400 |
| A2 High speed steel | D5 Polypropylene, w/talcum | L2 Incolloy 825 |
| A8 Zinc plated steel | D6 Polypropylene, 25% glass fiber | L8 Hastelloy |
| A9 Nickel plated steel | D7 High Density Polyethylene | P6 Acrylic but. styrene (ABS) |
| B1 AISI 303 Stainless steel | D8 Polyvinylidene fluoride (PVDF) | P8 EPDM, 40 Shore |
| B2 AISI 304 Stainless steel | E0 EPDM | T1 Brass |
| B21 AISI 304 L Stainless steel | E1 Ethylenpolytetrafluor. (PTFE) | T2 Chrome plated brass |
| B3 AISI 316 Stainless steel | E3 Acetalic resin (POM) | T3 Copper |
| B31 AISI 316 L Stainless steel | E31 DELRIN ® | T8 Nickel plated brass |
| B8 AISI 309 Stainless steel | E6 LUCITE ® (PMMA) | T81 ENP Brass |
| C2 AISI 416, Hardened SS | E7 Viton | T9 Brass body, Stainless steel set-up |
| D1 Polyvinylchloride (PVC) | E8 Synthetic rubber (NBR) | V1 Aluminum |
| D2 Polypropylene (PP) | H1 Titanium | V7 ENP Aluminum |

PROPERTIES OF A LIQUID SPRAY

The atomization of a liquid by means of a compressible fluid, like air, steam or a gas, is defined two-phase or twin-fluid or pneumatic atomization. Many industrial processes require using finely atomized droplets and the techniques to produce finely atomized sprays have been largely improved in recent years with new types of atomizers being developed.

In addition more sophisticated process techniques have increased the demand for a precise definition about the characteristics of a given spray for the purpose of getting precisely repeatable results. The most interesting parameters defining a given spray have been defined as in the following, and are now available to the process design engineer.

ARITHMETIC MEAN DIAMETER - AMD (D10)

This is the arithmetic Mean Value as calculated on the diameters from the total number of the drops in the sample spray.

VOLUME MEAN DIAMETER - VMD (D30)

This is the diameter of that drop whose volume is the arithmetic mean from the total number of the drops in the sample spray.


SAUTER MEAN DIAMETER - SMD (D32)

This is the diameter of that drop whose Volume/Surface ratio is the arithmetic mean from the total number of the drops in the sample spray.

The following Histograms and Diagrams are often used to resume the data referring to the above parameters and give a visual definition of a spray:


- *Volume percentage cumulative diagram*
- *Droplet diameter distribution Histogram*
- *Droplet velocity distribution Histogram*

The dimensional parameters and the above information make it possible to base process calculations on precise data atomization degree, efficiency of heat exchange and spray behavior in a given operation ambient. The knowledge of a value for the Sauter Mean Diameter SMD (D32) in a given spray is of special importance for the calculation of heating exchange in evaporative cooling processes, since it makes it possible to know the value of the total heat exchange surface obtained atomizing a known quantity of liquid.

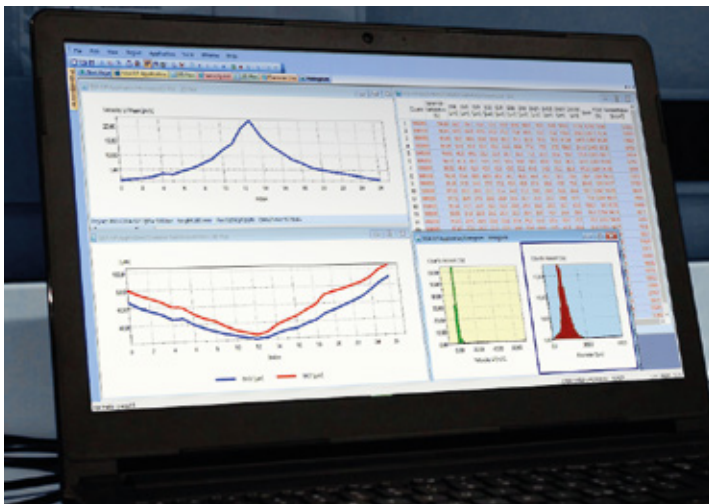

PNR can supply upon request complete documentation containing test reports about the aforementioned parameters for all PNR catalog and special atomizers.


The Histograms beside show the distribution of droplet diameters (D32) and velocities for one spray obtained in our laboratory.

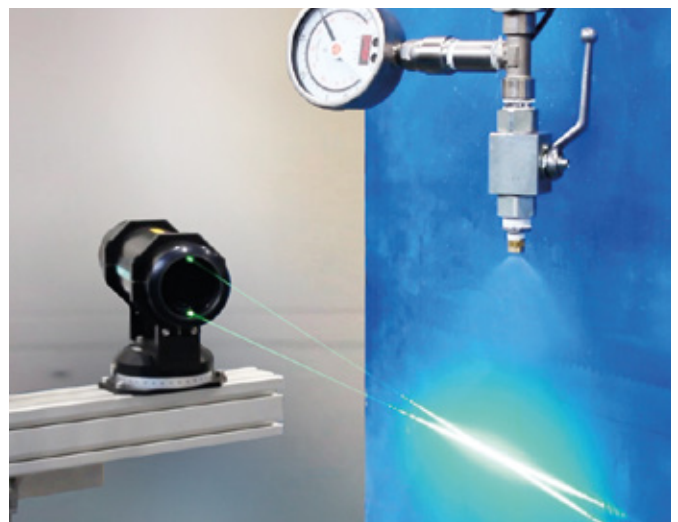

The photo beside shows a test performed in our laboratory. A laser Interferometer is used to measure and record the spray parameters, while fluid flow rates and feed pressures are monitored with high precision instruments.

PLEASE NOTE

All capacity values given in this catalog refer to test performed using water and compressed air. Atomizing liquids other than water, or using motive fluids different from compressed air will modify the performance of any atomizer, which have to be assessed through a laboratory test.



ULTRASONIC ATOMIZERS

Ultrasonic atomizers operate on a very sophisticated process which is based on two steps:

In the first one tiny water jets are injected into an high speed air flow which provides a first break up and atomization of the fluid.

In the second step the two phase flow, air entraining liquid droplets, goes trough a field of sound waves which produce a further break up and a lower droplet dimension. This is realized through an impact between the two phase flow and a resonator located in front of the nozzle orifice.



Ultrasonic atomizers can only be manufactured with high precision machining operations but offer the following remarkable advantages:

A.

The droplets in the atomized jet show low values for the Sauter Mean Diameter, and in addition a rather narrow range of individual droplet diameter: in other words the drops are very small and with little difference in diameter between the smallest and the biggest droplet. This means the spray is made by droplets very small and very similar in size, which is very important in all evaporative processes like for example air humidification: it is rather easy then to obtain values for the evaporation time and evaporation length of a given spray.


B.

The noticeable variations in local air pressure all around the resonator, associated to the sound waves, eliminate the danger of dust and foreign particles build-up in the vicinity of the nozzle orifice, thus avoiding a decay in the atomizer performance.

The system will then be very reliable and require limited or null maintenance.

These atomizers are mainly used in air humidification systems, that is for the atomization in the atmosphere of disinfectants and other pharmaceutical products.





CLASSIC ATOMIZERS

Classic atomizers are devices producing an atomized spray with the assistance of compressed air, where the liquid is broken into droplets when its outer surface is subjected to shear action from the high speed air flow.

By assembling together a range of standard components in different materials, several different capacity values, spray patterns, spray angles and operation modes can be obtained. In addition, specific application problems can be addressed by the use of special accessories available on request.



ATOMIZER SET-UP

The set-up is the device where air and liquid flow come in contact and produce the atomized jet. It consists of a liquid nozzle and an air nozzle, hose orifice dimensions are combined in several different ways in order to obtain the capacity, the spray pattern and the spray angle required.

The above spray parameters are given in the performance tables, besides each set-up code.



ATOMIZER BODIES

The atomizer body serves the purpose of conveniently connecting the set-up to the feed lines for air and water, and it may include some options like liquid shut-off or orifice cleaning needles. In addition to the MW type, the standard body, a more complete MX type includes an air operated cylinder for remote control of spray operation.

ACCESSORIES AND OPTIONS


In addition to the standard range of components some specific requirements like resistance to internal erosion or solid build-up from water borne foreign matters, body options with a different design or different spray control procedures, can be addressed with special parts.



SPRAY SET-UP

A spray set-up is made out of a liquid nozzle and an air nozzle. When assembled the air nozzle fits precisely onto the liquid nozzle and the combination of the two provides the correct inside geometry to produce the spray. Such parameters of the two parts as the number, dimensions and profile of their inside passages determines all the characteristics of the atomized spray produced by that given set-up. A set-up can be selected according to the choices below.

The capacity tables in the following catalog pages show the specification of each individual set-up, that is air and liquid capacities as a function of air and liquid feed pressures, and spray dimensions. Spray dimensions are understood measured in still air for several pressure values, and cannot be precisely defined, therefore we give indicative values of the maximum throw and of the distance for which the spray maintains a consistent shape.

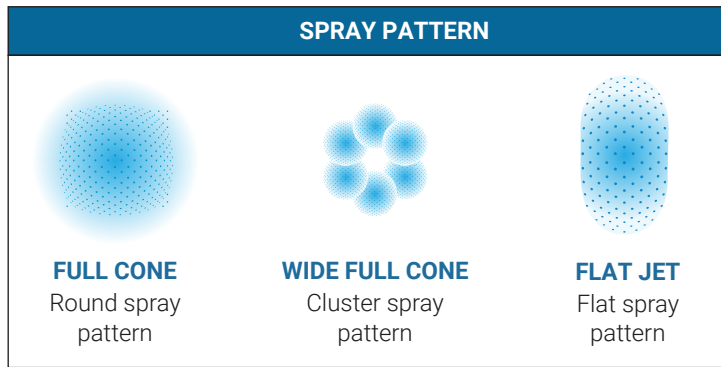

| | | |
|----------------------------|--------------|--------|
| OPERATION PRINCIPLE | Internal mix | Page 8 |
| | External mix | |


| | | |
|--------------------|------------------|--------|
| LIQUID FEED | Pressure feeding | Page 8 |
| | Siphon feeding | |

SET-UP PARTS

The set-up code, complete with the material code, can be used to order air and liquid nozzle together.

Under the set-up code, air (An) and liquid nozzle (Ln) codes are shown separately for ordering them as spare parts, while Teflon seal and locknut can be ordered with the codes shown beside.

All PNR components are made interchangeable and can be combined even if made in different materials, like for example assembling an erosion resistant set-up in stainless steel with a brass body.

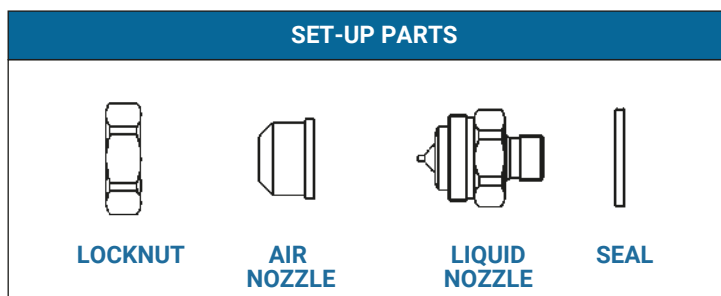

VAM 1901 xx

VDA 0981 E1*

| | |
|--------------------|----------|
| SET-UP CODE | SUB 1520 |
|--------------------|----------|

| | |
|----------------------|--------------------|
| Ln XMW 5001xx | Liquid nozzle code |
| An XMW 4001xx | Air nozzle code |

* Standard seal is in Teflon; on request, we can provide:

- Copper (VDA 0981 T3);
- Viton (VDA 0981 E7);
- AISI 316L (VDA 0981 B31).

COMPLETE ATOMIZER CODE

Once the set-up code (and therefore the spray characteristics, has been chosen) it is necessary to choose the body and the options required to come to the complete atomizer code.


A set-up can be assembled basically on two different body types:

BASIC BODY

This body serves the only purpose of connecting the set-up inlets to the air and liquid feed lines. The plug on the body top can be replaced by several option equipment as shown next page.

AIR ACTUATED BODY

This body has a built in air cylinder allowing to start and stop the spray from a remote location.

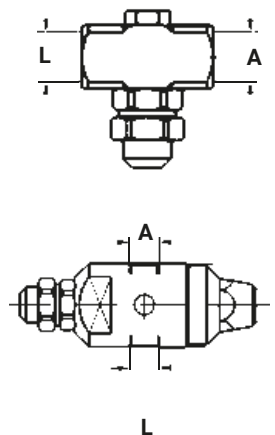

ATOMIZER FEEDING

An atomizer can work on two different liquid feed principles, that is:

- Liquid is supplied to the atomizer through a line under pressure
- Liquid is aspirated by the atomizer from a container at ambient pressure.

| | | |
|----------------------------------|--|--|
| <p>PRESSURE PRINCIPLE</p> | <p>It is the most widely used, and therefore a large range of capacities and spray patterns are available. Liquid capacity, air capacity and droplet sizes can be adjusted by regulating air and liquid feed pressures and the two fluids are mixed inside the atomizer prior to be ejected (<i>Internal mix atomizers</i>). A different type allows for mixing the fluids just after they are ejected from the orifice, avoiding mutual influence of the two fluid pressure values inside a mixing chamber and allowing wider regulation range (<i>External mix atomizers</i>).</p> | |
| <p>SIPHON PRINCIPLE</p> | <p>These atomizers offer lower capacity values for liquids and a simpler layout since the liquid is aspirated from the atomizer through a Venturi effect. The liquid is simply supplied from an open container, whose level can be lower or higher than the atomizer one to fine tune the liquid capacity. The atomizing air provides the vacuum necessary into the mixing chamber for the Venturi effect.</p> | |

SPRAY GENERATION

The set-up can be designed in two different ways so as to obtain the following actions:

- Air and liquid are mixed up in a mixing chamber inside the atomizer and then they are ejected through the orifice as a spray.
- Air and liquid are ejected from the atomizer through different orifices, and the spray is generated by the impact of the two jets.

| | | |
|------------------------------------|--|--|
| <p>INTERNAL MIX SET-UPS</p> | <p>The spray is ejected from one or more orifices in the wall of a mixing chamber. In these atomizers a change in the pressure of one of the fluids inside the mixing chamber has an influence on the capacity of the second fluid and this effect reduces the ease of regulation. As an example, increasing the air pressure will decrease the liquid quantity being atomized and the droplet size, and vice-versa.</p> | |
| <p>EXTERNAL MIX SET-UPS</p> | <p>The two fluids are ejected through different orifices, their mixing happens outside the orifice. Therefore their pressure values can be adjusted avoiding cross influence with a more precise and stable regulation. External mix set-ups can only work with liquid feed under pressure, and only produce flat jet spray.</p> | |

MW

BODY TYPES AND OPTIONS

COMPLETE CODE

To obtain the complete code for an atomizer it is necessary to use the set-up code you have chosen from the performance table and complete it with the code for body and options as follows:

- Replace the first two letters in the set-up code (SU) with the code for standard body (MW).
- Add the code for the material you require.
- Add the code for the required options, if any, and the thread type code.

MWB 1520 **X** **Y** **Z**





MATERIALS


- B1** = AISI 303 Stainless steel
- B31** = AISI 316L Stainless steel
- D1** = PVC
- E6** = LUCITE® (PMMA)
- T8** = Nickel plated brass

CONNECTION

- G** = BSP Female (EU)
- N** = NPT Female (US)

OPTIONS

- A**  BASIC BODY
- B**  SHUT-OFF NEEDLE
- C**  CLEANING NEEDLE
- D**  CLEAN AND SHUT-OFF NEEDLE

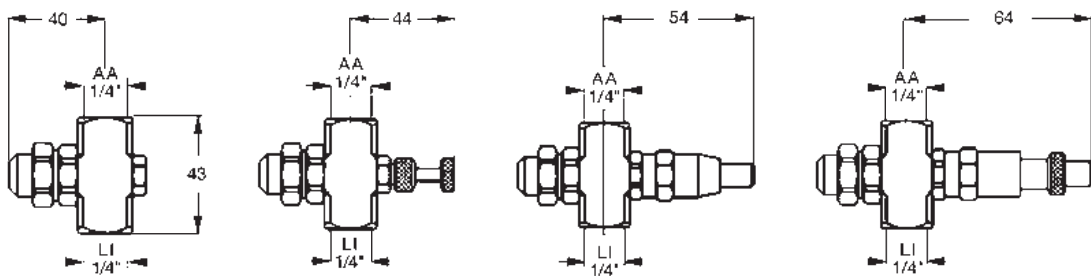

AA = air inlet (1/4" F)
 LI = liquid inlet (1/4" F)



MX

BODY TYPES AND OPTIONS

AIR ACTUATED ATOMIZER


MX bodies contain an air actuated cylinder which controls the spray operation by means of a needle, opening or closing the water inlet in the liquid nozzle. Normally the air used for atomizing the liquid flows continuously, while the air to the actuator is used to start and stop the atomizing cycles.

For longer idle times between two atomizing cycles, where too much atomizing air would be wasted, sequenced shut-off should be organized for the two air lines. The actuator air should be stopped (and the liquid flow interrupted) before atomizing air to be sure all liquid inside is completely atomized and dripping is avoided. Conversely, when spray begins, atomizing air should be started first so that incoming liquid is atomized without dripping.

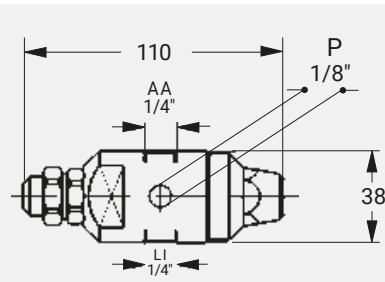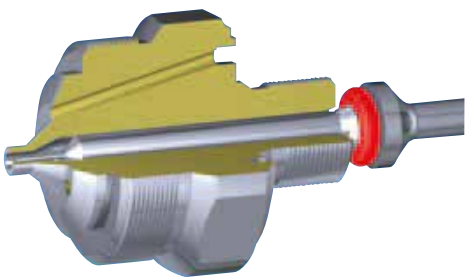

STANDARD SIZE

AA = atomizing air inlet (1/4" F)
 LI = liquid inlet (1/4" F)
 AC = cylinder air inlet (1/8" F)

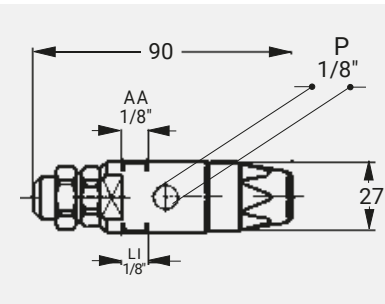

MINI SIZE

AA = atomizing air inlet (1/8" F)
 LI = liquid inlet (1/8" F)
 AC = cylinder air inlet (1/8" F)

COMPLETE CODE

To obtain the complete code for an atomizer it is necessary to use the set-up code you have chosen from the performance table and complete it with the code for body and options as follows.

- Replace the first two letters in the set-up code (SU) with the code for air actuated body (MX).
- Add the code for the material you require.
- Add the code for the required options and the code for thread type.

NO-DRIP NEEDLE

Our engineers have invented, developed and introduced on the market a no-drip needle (Italian Patent MI96U-00541) to assure positive liquid shut-off and completely drip-free operation.

This solved completely the old problem of dripping atomizers as offered from our competitors. All air actuated PNR atomizers include this better and more consistent design as standard.

MXB 1520 **X** **YY** **Z**

MATERIALS

B1 = AISI 303 Stainless steel
B31 = AISI 316L Stainless steel
T8 = Nickel plated brass

CONNECTION

G =BSP Female (EU)
N = NPT Female (US)


| OPTIONS | SHUT-OFF NEEDLE | CLEANING NEEDLE |
|---------------------------|-----------------|-----------------|
| Standard | SA | SB |
| Mini | MA | MB |
| Standard single air inlet | UA | UB |
| Mini single air inlet | NA | NB |

FULL CONE SPRAY


These single orifice set-ups produce narrow angle, full cone shaped, atomized sprays with a spray angle of about 20°. The spray length can reach from 2.500 to 9.000 mm depending upon the set-up type and operating conditions. See advice on adjustment for flow rates and droplet size given at page 8.

- MATERIALS B1 AISI 303 STAINLESS STEEL
 B31 AISI 316L STAINLESS STEEL
 D1 PVC
 E6 LUCITE ® (PMMA)
 T8 NICKEL PLATED BRASS

WH = Water capacity (l/hour)
 AM = Air capacity (NI/min)

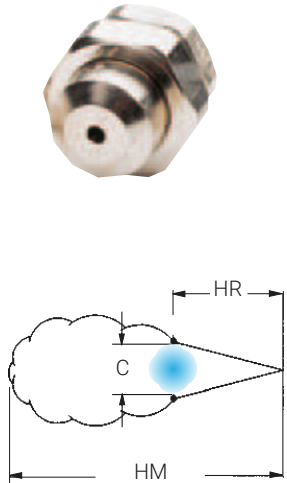

| SET-UP CODE | AIR PRESSURE (BAR) | | | | | | | | | | | | | | | | |
|---|--------------------|------|------|------|------|------|-----|------|------|------|------|------|-----|-----|------|-----|------|
| | 0,7 | | 1,0 | | 1,5 | | 2,0 | | 3,0 | | 4,0 | | PA | PL | HR | C | HM |
| | WH | AM | WH | AM | WH | AM | WH | AM | WH | AM | WH | AM | | | | | |
| SUB 1520 Ln XMW 5001 An XMW 4001 | 0,7 | 2,5 | 15,6 | 1,4 | 6,4 | 13,9 | 2,7 | 6,2 | 23,0 | 3,5 | 7,8 | 28,0 | - | - | - | - | - |
| | 0,9 | 1,8 | 19,0 | 1,7 | 5,5 | 16,7 | 2,8 | 5,7 | 25,0 | 3,7 | 7,3 | 29,0 | 0,9 | 0,7 | 300 | 68 | 2700 |
| | 1,0 | 1,4 | 22,0 | 2,0 | 4,5 | 19,8 | 3,0 | 5,2 | 27,0 | 3,9 | 6,4 | 33,0 | 1,7 | 1,5 | 330 | 75 | 3000 |
| | - | - | - | 2,2 | 3,4 | 24,0 | 3,1 | 4,7 | 29,0 | 4,2 | 5,5 | 38,0 | 2,5 | 2,0 | 360 | 82 | 3400 |
| | - | - | - | 2,4 | 3,0 | 26,0 | 3,2 | 4,3 | 31,0 | 4,5 | 4,5 | 43,0 | 3,1 | 3,0 | 390 | 96 | 3800 |
| SUB 1670 Ln XMW 5001 An XMW 4002 | 0,7 | 2,5 | 18,7 | 1,7 | 6,7 | 29,0 | 2,2 | 9,2 | 34,0 | 2,8 | 11,9 | 39,0 | - | - | - | - | - |
| | 0,9 | 2,0 | 22,0 | 1,8 | 6,4 | 31,0 | 2,5 | 8,2 | 39,0 | 3,1 | 11,0 | 43,0 | 0,9 | 0,7 | 430 | 90 | 3700 |
| | 1,0 | 1,6 | 26,0 | 2,0 | 5,9 | 34,0 | 2,8 | 7,2 | 44,0 | 3,4 | 10,1 | 47,0 | 1,5 | 1,5 | 460 | 105 | 4000 |
| | - | - | - | 2,1 | 5,2 | 37,0 | 3,0 | 6,7 | 47,0 | 3,7 | 9,2 | 52,0 | 2,4 | 2,0 | 480 | 109 | 4300 |
| | - | - | - | 2,2 | 4,8 | 40,0 | 3,1 | 6,3 | 49,0 | 3,9 | 8,4 | 58,0 | 3,0 | 3,0 | 510 | 116 | 4600 |
| SUB 2142 Ln XMW 5002 An XMW 4002 | 0,9 | 4,8 | 21,0 | 2,0 | 10,7 | 33,0 | 2,7 | 16,5 | 37,0 | 3,4 | 20,0 | 43,0 | - | - | - | - | - |
| | 1,1 | 4,1 | 27,0 | 2,1 | 9,8 | 37,0 | 2,8 | 15,4 | 38,0 | 3,7 | 18,4 | 47,0 | 1,5 | 0,7 | 480 | 100 | 4000 |
| | 1,4 | 3,4 | 33,0 | 2,4 | 8,2 | 42,0 | 3,1 | 13,6 | 43,0 | 3,9 | 16,8 | 50,0 | 2,5 | 1,5 | 510 | 116 | 4300 |
| | 1,5 | 3,1 | 35,0 | 2,7 | 6,8 | 48,0 | 3,4 | 11,8 | 49,0 | 4,2 | 15,2 | 55,0 | 3,0 | 2,0 | 530 | 120 | 4600 |
| | 1,7 | 3,0 | 39,0 | 3,0 | 5,9 | 55,0 | 3,7 | 10,4 | 55,0 | 4,5 | 13,8 | 60,0 | 3,4 | 3,0 | 560 | 137 | 4900 |
| SUC 2376 Ln XMW 5003 An XMW 4003 | 1,8 | 2,9 | 41,0 | 3,2 | 5,0 | 59,0 | 3,9 | 9,1 | 61,0 | 4,8 | 12,4 | 65,0 | 4,2 | 4,0 | 600 | 158 | 5300 |
| | 2,0 | 2,8 | 44,0 | 3,5 | 4,1 | 65,0 | 4,2 | 7,9 | 65,0 | 4,9 | 11,8 | 68,0 | - | - | - | - | - |
| | 1,1 | 13,0 | 76,0 | 2,8 | 20,0 | 136 | 3,4 | 32,0 | 149 | 4,6 | 37,0 | 193 | - | - | - | - | - |
| | 1,4 | 8,9 | 91,0 | 3,1 | 16,3 | 149 | 3,9 | 25,0 | 170 | 5,3 | 29,0 | 220 | 1,7 | 0,7 | 660 | 209 | 4900 |
| | 1,5 | 7,2 | 98,0 | 3,4 | 11,9 | 163 | 4,6 | 15,9 | 205 | 5,6 | 25,0 | 235 | 2,8 | 1,5 | 760 | 268 | 6100 |
| SUC 2690 Ln XMW 5004 An XMW 4003 | 1,7 | 5,8 | 105 | 3,9 | 7,0 | 187 | 5,3 | 9,1 | 240 | 6,0 | 21,0 | 250 | 3,9 | 2,0 | 810 | 286 | 6700 |
| | 1,8 | 4,7 | 112 | 4,2 | 4,7 | 205 | 5,6 | 6,8 | 255 | 6,3 | 17,4 | 270 | 5,3 | 3,0 | 910 | 337 | 7900 |
| | 2,0 | 3,6 | 119 | 4,6 | 3,0 | 220 | 6,0 | 5,0 | 275 | 6,7 | 14,0 | 290 | 6,0 | 4,0 | 970 | 359 | 9100 |
| | 2,1 | 2,7 | 127 | - | - | - | 6,3 | 3,6 | 290 | 7,0 | 11,0 | 305 | - | - | - | - | - |
| | 0,9 | 31,0 | 57,0 | 2,1 | 53,0 | 96,0 | 2,7 | 80,0 | 103 | 3,8 | 88,0 | 135 | - | - | - | - | - |
| SUC 3129 Ln XMW 5005 An XMW 4004 | 1,0 | 25,0 | 66,0 | 2,4 | 41,0 | 112 | 3,0 | 69,0 | 117 | 4,2 | 73,0 | 156 | 1,0 | 0,7 | 610 | 182 | 4900 |
| | 1,1 | 18,5 | 75,0 | 2,7 | 31,0 | 127 | 3,2 | 59,0 | 130 | 4,6 | 61,0 | 176 | 1,8 | 1,5 | 690 | 218 | 5800 |
| | 1,3 | 12,9 | 85,0 | 2,8 | 26,0 | 136 | 3,5 | 49,0 | 146 | 4,9 | 48,0 | 196 | 2,8 | 2,0 | 760 | 268 | 6700 |
| | - | - | - | 3,0 | 22,0 | 144 | 3,7 | 44,0 | 154 | 5,3 | 39,0 | 215 | 3,5 | 3,0 | 790 | 278 | 7000 |
| | - | - | - | - | - | - | 3,8 | 37,0 | 161 | 5,6 | 31,0 | 240 | 4,9 | 4,0 | 910 | 337 | 8500 |
| 1,0 | 44,0 | 86,0 | 2,0 | 123 | 108 | 2,2 | 199 | 88,0 | 3,0 | 250 | 99,0 | - | - | - | - | - | |
| SUC 3129 Ln XMW 5005 An XMW 4004 | 1,1 | 32,0 | 102 | 2,1 | 108 | 119 | 2,5 | 174 | 110 | 3,2 | 225 | 120 | 1,0 | 0,7 | 890 | 298 | 6100 |
| | - | - | - | 2,2 | 95,0 | 130 | 2,8 | 146 | 133 | 3,5 | 205 | 141 | 1,7 | 1,5 | 990 | 349 | 7000 |
| | - | - | - | 2,4 | 79,0 | 143 | 3,1 | 121 | 154 | 3,8 | 182 | 163 | 2,4 | 2,0 | 1040 | 385 | 7600 |
| | - | - | - | 2,5 | 64,0 | 155 | 3,2 | 108 | 166 | 4,1 | 159 | 184 | 3,1 | 3,0 | 1070 | 396 | 7900 |
| | - | - | - | 2,7 | 52,0 | 166 | 3,4 | 95 | 176 | 4,6 | 121 | 225 | 3,8 | 4,0 | 1170 | 455 | 9100 |
| - | - | - | 2,8 | 42,0 | 178 | 3,5 | 84 | 187 | 4,9 | 93,0 | 255 | - | - | - | - | - | |




WIDE ANGLE FULL CONE SPRAY

These multi-orifice set-ups produce wide angle, full cone shaped, atomized sprays as a result from the combination of several narrow angle sprays.

The resulting encompassed spray angle is about 60°. The spray length can reach from 1.500 to 10.400 mm depending upon the set-up type and operating conditions. See advice on adjustment for flow rates and droplet size given at page 8.

MATERIALI B1 AISI 303 STAINLESS STEEL
 B31 AISI 316L STAINLESS STEEL
 D1 PVC
 T8 NICKEL PLATED BRASS

WH = Water capacity (l/hour)
 AM = Air capacity (NI/min)

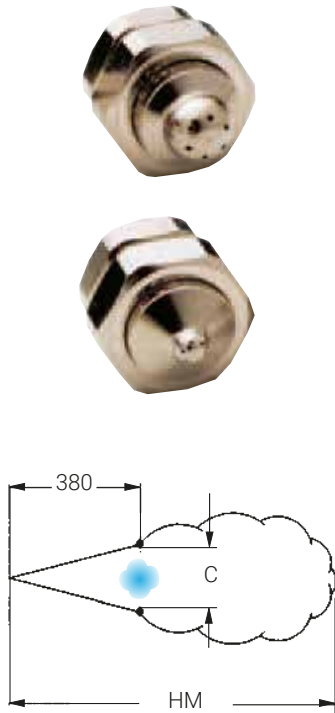

| SET-UP CODE | AIR PRESSURE (BAR) | | | | | | | | | | | | | | | |
|-----------------|----------------------------|------|------|------|------|------|------|------|------|------|------|------|------|-----|-----|-------|
| | 0,7 | | 1,0 | | 1,5 | | 2,0 | | 3,0 | | 4,0 | | PA | PL | C | HM |
| | WH | AM | WH | AM | WH | AM | WH | AM | WH | AM | WH | AM | | | | |
| SUL 1640 | 0,6 | 5,3 | 10,2 | 1,5 | 8,1 | 16,4 | 2,4 | 8,9 | 22,0 | 3,1 | 10,5 | 24,0 | 0,7 | 0,7 | 230 | 1500 |
| | 0,7 | 4,3 | 12,2 | 1,8 | 6,6 | 21,0 | 2,7 | 8,1 | 26,0 | 3,4 | 9,7 | 28,0 | 1,4 | 1,5 | 240 | 1800 |
| | 0,9 | 3,0 | 14,2 | 2,1 | 4,9 | 25,0 | 3,0 | 6,4 | 30,0 | 3,9 | 7,8 | 36,0 | 1,8 | 2,0 | 250 | 2100 |
| | 1,0 | 1,7 | 17,0 | 2,4 | 3,2 | 29,0 | 3,2 | 4,9 | 34,0 | 4,2 | 6,1 | 42,0 | 3,0 | 3,0 | 260 | 2700 |
| | Ln XMW 5001 An XMW 4010 | - | - | - | - | - | - | 3,4 | 4,2 | 37,0 | 4,6 | 4,4 | 47,0 | 3,9 | 4,0 | 300 |
| SUM 2220 | 0,9 | 7,0 | 50,0 | 2,0 | 18,5 | 68,0 | 2,8 | 25,0 | 84,0 | 3,7 | 31,0 | 96,0 | - | - | - | - |
| | 1,0 | 2,1 | 62,0 | 2,1 | 15,1 | 76,0 | 3,0 | 22,0 | 92,0 | 3,8 | 28,0 | 105 | 0,9 | 0,7 | 310 | 1800 |
| | - | - | - | 2,2 | 11,7 | 85,0 | 3,1 | 18,5 | 101 | 3,9 | 26,0 | 113 | 1,7 | 1,5 | 330 | 2400 |
| | - | - | - | - | - | - | 3,2 | 15,1 | 109 | 4,1 | 23,0 | 122 | 2,1 | 2,0 | 330 | 3200 |
| | Ln XMW 5003 An XMW 4011 | - | - | - | - | - | - | 3,4 | 12,1 | 119 | 4,2 | 20,0 | 130 | 3,2 | 3,0 | 340 |
| SUL 2330 | 1,1 | 12,3 | 40,0 | 2,7 | 21,0 | 69,0 | 4,2 | 19,3 | 100 | 5,6 | 22,0 | 130 | - | - | - | - |
| | 1,3 | 9,9 | 45,0 | 3,0 | 16,3 | 78,0 | 4,6 | 14,6 | 113 | 6,0 | 17,6 | 142 | 1,5 | 0,7 | 230 | 2700 |
| | 1,4 | 7,9 | 50,0 | 3,2 | 12,3 | 86,0 | 4,9 | 10,8 | 124 | 6,3 | 14,0 | 152 | 3,0 | 1,5 | 240 | 4600 |
| | 1,5 | 6,1 | 54,0 | 3,4 | 10,7 | 91,0 | 5,3 | 8,1 | 135 | 6,7 | 11,4 | 163 | 3,4 | 2,0 | 240 | 5500 |
| | Ln XMW 5003 An XMW 4013 | 1,7 | 4,9 | 58,0 | 3,5 | 9,3 | 94,0 | 5,6 | 6,2 | 146 | 7,0 | 9,1 | 174 | 5,3 | 3,0 | 250 |
| SUM 2460 | 0,7 | 24,0 | 32,0 | 2,1 | 33,0 | 66,0 | 2,8 | 52,0 | 65,0 | 3,7 | 63,0 | 68,0 | - | - | - | - |
| | 0,9 | 13,6 | 44,0 | 2,2 | 26,0 | 78,0 | 3,0 | 46,0 | 76,0 | 3,8 | 58,0 | 79,0 | 0,9 | 0,7 | 360 | 2100 |
| | 1,0 | 7,6 | 57,0 | 2,4 | 18,9 | 89,0 | 3,1 | 39,0 | 87,0 | 3,9 | 52,0 | 101 | 1,5 | 1,5 | 370 | 3200 |
| | - | - | - | 2,5 | 11,7 | 100 | 3,2 | 33,0 | 99,0 | 4,2 | 41,0 | 111 | 2,4 | 2,0 | 370 | 4100 |
| | Ln XMW 5004 An XMW 4011 | - | - | - | - | - | - | 3,4 | 26,0 | 110 | 4,6 | 27,0 | 138 | 3,2 | 3,0 | 380 |
| SUM 2860 | 1,3 | 36,0 | 85,0 | 3,1 | 53,0 | 156 | 4,2 | 64,0 | 197 | 5,6 | 74,0 | 245 | - | - | - | - |
| | 1,5 | 29,0 | 102 | 3,2 | 50,0 | 163 | 4,9 | 51,0 | 230 | 6,0 | 68,0 | 260 | 2,0 | 0,7 | 330 | 5500 |
| | 1,8 | 23,0 | 117 | 3,4 | 47,0 | 170 | 5,6 | 40,0 | 265 | 6,3 | 62,0 | 280 | 3,0 | 1,5 | 340 | 6400 |
| | 2,0 | 19,7 | 125 | 3,5 | 45,0 | 177 | 6,0 | 34,0 | 285 | 6,7 | 56,0 | 295 | 3,9 | 2,0 | 370 | 8200 |
| | Ln XMW 5004 An XMW 4012 | 2,1 | 16,7 | 133 | 3,9 | 38,0 | 194 | 6,3 | 28,0 | 300 | 7,0 | 51,0 | 315 | 6,0 | 3,0 | 380 |
| SUQ 3140 | 2,3 | 14,0 | 142 | 4,6 | 25,0 | 230 | 6,7 | 22,0 | 320 | - | - | - | 6,3 | 4,0 | 410 | 10400 |
| | 2,4 | 11,4 | 149 | 4,9 | 18,5 | 245 | 7,0 | 17,8 | 335 | - | - | - | - | - | - | - |
| | 1,7 | 25,0 | 156 | 3,4 | 50,0 | 250 | 4,6 | 62,0 | 320 | 6,0 | 93,0 | 395 | 2,0 | 0,7 | 460 | 5500 |
| | 1,8 | 19,7 | 167 | 3,5 | 43,0 | 260 | 4,9 | 47,0 | 345 | 6,3 | 77,0 | 425 | 3,2 | 1,5 | 470 | 6400 |
| | Ln XMW 5005 An XMW 4014 | 2,0 | 15,1 | 178 | 3,7 | 41,0 | 275 | 5,3 | 36,0 | 375 | 6,7 | 62,0 | 460 | 3,9 | 2,0 | 510 |
| - | 2,1 | 11,4 | 193 | 3,9 | 27,0 | 300 | 5,6 | 26,0 | 405 | 7,0 | 52,0 | 495 | 5,3 | 3,0 | 530 | 7900 |
| - | 2,3 | 7,6 | 205 | 4,1 | 23,0 | 310 | 6,0 | 18,9 | 435 | - | - | - | 6,3 | 4,0 | 580 | 9800 |
| - | - | - | 4,2 | 18,9 | 320 | 6,3 | 13,6 | 460 | - | - | - | - | - | - | - | - |
| - | - | - | 4,4 | 15,9 | 335 | - | - | - | - | - | - | - | - | - | - | - |

FLAT SPRAY

These single orifice set-ups produce flat fan shaped atomized sprays. The spray length can reach from 1.800 to 5.200 mm depending upon the set-up type and operating conditions. See advice on adjustment for flow rates and droplet size given at page 8.

MATERIALS B1 AISI 303 STAINLESS STEEL
 B31 AISI 316L STAINLESS STEEL
 D1 PVC
 T8 NICKEL PLATED BRASS

WH = Water capacity (l/hour)
 AM = Air capacity (NI/min)



| SET-UP CODE | AIR PRESSURE (BAR) | | | | | | | | | | | | | | | | |
|----------------------------|--------------------|------|------|-----|------|------|-----|------|------|-----|------|------|-----|-----|-----|------|------|
| | 0,7 | | 2,0 | | 3,0 | | 4,0 | | 5,0 | | 6,0 | | 7,0 | | 8,0 | | |
| | WH | AM | WH | AM | WH | AM | WH | AM | WH | AM | WH | AM | PA | PL | C | HM | |
| SUU 2101 | 0,7 | 5,5 | 24 | 2,0 | 8,6 | 42 | 2,7 | 11,2 | 52 | 3,9 | 12 | 69 | 1,1 | 0,7 | 460 | 2600 | |
| | 0,9 | 4,7 | 27 | 2,2 | 7,5 | 47 | 3,0 | 10,1 | 56 | 4,6 | 9,7 | 81 | 2,1 | 1,5 | 660 | 3000 | |
| | 1,0 | 4,1 | 31 | 2,5 | 6,2 | 52 | 3,2 | 9,1 | 62 | 5,3 | 7,5 | 93 | 2,8 | 2,0 | 760 | 3200 | |
| | 1,1 | 3,5 | 34 | 2,8 | 5,2 | 57 | 3,5 | 8,1 | 66 | 6,0 | 5,3 | 104 | 3,5 | 3,0 | 860 | 3400 | |
| | 1,3 | 3,0 | 37 | 3,1 | 4,2 | 63 | 4,2 | 5,4 | 79 | 6,3 | 4,3 | 110 | 6,0 | 4,0 | 940 | 4000 | |
| | 1,4 | 2,5 | 40 | 3,2 | 3,7 | 65 | 4,6 | 4,2 | 85 | 6,7 | 3,3 | 116 | - | - | - | - | |
| Ln XMW 5001 An XMW 4020 | 1,5 | 2,0 | 44 | 3,4 | 3,2 | 68 | 4,9 | 3,1 | 91 | 7,0 | 2,4 | 122 | - | - | - | - | |
| SUU 2160 | 1,3 | 3,9 | 30 | 3,0 | 6,1 | 52 | 3,9 | 9,4 | 60 | 5,3 | 10,2 | 78 | 1,5 | 0,7 | 460 | 1800 | |
| | 1,4 | 3,0 | 33 | 3,1 | 5,3 | 54 | 4,2 | 7,2 | 67 | 5,6 | 8,3 | 84 | 2,7 | 1,5 | 690 | 2000 | |
| | 1,5 | 2,3 | 35 | 3,2 | 4,5 | 57 | 4,6 | 5,3 | 73 | 6,0 | 6,6 | 89 | 3,2 | 2,0 | 910 | 2000 | |
| | 1,7 | 1,8 | 38 | 3,4 | 3,8 | 59 | 4,9 | 3,8 | 80 | 6,3 | 5,1 | 98 | 4,2 | 3,0 | 940 | 2100 | |
| | 1,8 | 1,3 | 41 | 3,5 | 3,2 | 62 | - | - | - | - | - | - | 5,6 | 4,0 | 970 | 2300 | |
| | 2,0 | 1,0 | 44 | 3,9 | 1,8 | 68 | - | - | - | - | - | - | - | - | - | - | |
| Ln XMW 5002 An XMW 4022 | SUM 2167 | 1,0 | 9,0 | 25 | 2,4 | 11,6 | 48 | 3,1 | 15,6 | 56 | 4,2 | 17,1 | 73 | 1,4 | 0,7 | 170 | 3000 |
| 1,1 | | 7,8 | 30 | 2,5 | 10,4 | 51 | 3,2 | 14,6 | 59 | 4,6 | 15 | 80 | 2,5 | 1,5 | 200 | 3700 | |
| 1,3 | | 6,6 | 32 | 2,7 | 9,40 | 54 | 3,4 | 13,7 | 62 | 4,9 | 12,8 | 87 | 3,2 | 2,0 | 220 | 4000 | |
| 1,4 | | 5,2 | 36 | 3,0 | 7,30 | 61 | 3,8 | 10,8 | 71 | 5,3 | 11 | 94 | 3,8 | 3,0 | 280 | 4200 | |
| 1,7 | | 3,1 | 44 | 3,2 | 5,50 | 68 | 4,2 | 8,5 | 82 | 5,6 | 9,4 | 103 | 5,3 | 4,0 | 330 | 4800 | |
| 2,0 | | 2,0 | 50 | 3,5 | 4,10 | 75 | 4,9 | 5,2 | 98 | 6,3 | 7,2 | 119 | - | - | - | - | |
| Ln XMW 5002 An XMW 4021 | 2,2 | 1,1 | 56 | 3,8 | 2,90 | 81 | 6,0 | 2,3 | 120 | 7,0 | 6,1 | 134 | - | - | - | - | |
| SUU 2171 | 0,9 | 8,2 | 20 | 2,1 | 13,5 | 36 | 2,7 | 19,1 | 42 | 4,6 | 16,1 | 69 | 1,1 | 0,7 | 710 | 2100 | |
| | 1,0 | 6,8 | 23 | 2,4 | 11,4 | 42 | 3,0 | 17,1 | 46 | 4,9 | 13,8 | 76 | 2,1 | 1,5 | 810 | 2400 | |
| | 1,1 | 5,5 | 27 | 2,7 | 9,20 | 47 | 3,2 | 15,1 | 52 | 5,3 | 11,5 | 83 | 3,0 | 2,0 | 890 | 2600 | |
| | 1,3 | 4,1 | 30 | 3,0 | 7,10 | 53 | 3,5 | 13,1 | 57 | 5,6 | 9,3 | 90 | 3,5 | 3,0 | 970 | 2700 | |
| | 1,4 | 2,9 | 34 | 3,2 | 5,00 | 59 | 4,2 | 8,1 | 72 | 6,0 | 7,3 | 97 | 5,6 | 4,0 | 970 | 3200 | |
| | - | - | - | - | 3,4 | 63 | 4,6 | 5,9 | 79 | 6,3 | 5,6 | 104 | - | - | - | - | |
| Ln XMW 5002 An XMW 4020 | - | - | - | 3,5 | 3,30 | 66 | 4,9 | 4,0 | 86 | 6,7 | 4,3 | 112 | - | - | - | - | |
| SUM 2320 | 1,1 | 11,2 | 54 | 2,7 | 19,6 | 93 | 3,5 | 27 | 112 | 4,6 | 33 | 137 | 1,4 | 0,7 | 200 | 3000 | |
| | 1,3 | 8,5 | 60 | 2,8 | 17,3 | 98 | 3,7 | 25 | 116 | 4,9 | 28 | 149 | 2,4 | 1,5 | 330 | 3200 | |
| | 1,4 | 6,5 | 65 | 3,0 | 15,2 | 103 | 3,8 | 23 | 121 | 5,3 | 24 | 161 | 3,0 | 2,0 | 460 | 3400 | |
| | 1,5 | 5,0 | 71 | 3,1 | 13,2 | 109 | 3,9 | 21 | 126 | 5,6 | 19,7 | 174 | 3,7 | 3,0 | 460 | 3500 | |
| | 1,7 | 3,8 | 77 | 3,2 | 11,4 | 114 | 4,1 | 18,9 | 132 | 6,0 | 15,7 | 187 | 5,3 | 4,0 | 480 | 4000 | |
| | - | - | - | - | - | - | 4,2 | 17 | 137 | 6,3 | 12,4 | 200 | - | - | - | - | |
| Ln XMW 5003 An XMW 4024 | SUM 2600 | 1,0 | 17,0 | 23 | 2,4 | 28,0 | 51 | 3,4 | 38 | 72 | 3,9 | 65 | 75 | 1,1 | 0,7 | 150 | 2400 |
| 1,1 | | 11,0 | 27 | 2,5 | 23,0 | 59 | 3,5 | 33 | 80 | 4,2 | 53 | 89 | 2,1 | 1,5 | 170 | 3000 | |
| 1,3 | | 7,6 | 33 | 2,7 | 18,9 | 66 | 3,7 | 28 | 89 | 4,6 | 40 | 108 | 2,8 | 2,0 | 220 | 3400 | |
| 1,4 | | 3,2 | 40 | 2,8 | 15,1 | 74 | 3,8 | 23 | 97 | 4,9 | 30 | 127 | 3,7 | 3,0 | 280 | 3600 | |
| - | | - | - | 3,0 | 11,7 | 79 | 3,9 | 19,7 | 105 | 5,3 | 21 | 149 | 4,9 | 4,0 | 350 | 4000 | |
| - | | - | - | - | - | - | 4,2 | 13,1 | 120 | 5,6 | 13,8 | 173 | - | - | - | - | |
| Ln XMW 5004 An XMW 4023 | - | - | - | - | - | 4,6 | 7,2 | 138 | 6,3 | 3,2 | 225 | - | - | - | - | | |
| SUQ 2700 | 0,9 | 27,0 | 33 | 2,4 | 39,0 | 67 | 3,2 | 58 | 76 | 4,6 | 59 | 106 | 1,1 | 0,7 | 300 | 3400 | |
| | 1,0 | 20,0 | 38 | 2,7 | 30,0 | 77 | 3,5 | 47 | 87 | 5,3 | 40 | 132 | 2,4 | 1,5 | 410 | 3500 | |
| | 1,1 | 15,9 | 45 | 3,0 | 24,0 | 87 | 3,8 | 38 | 97 | 5,6 | 32 | 145 | 3,2 | 2,0 | 430 | 3700 | |
| | 1,3 | 12,5 | 48 | 3,2 | 17,8 | 98 | 3,9 | 34 | 103 | 6,0 | 26 | 158 | 3,9 | 3,0 | 480 | 3800 | |
| | 1,4 | 10,2 | 56 | 3,4 | 15,1 | 103 | 4,2 | 27 | 113 | 6,3 | 20 | 172 | 6,0 | 4,0 | 510 | 4400 | |
| | 1,5 | 7,6 | 62 | 3,5 | 12,9 | 109 | 4,6 | 20 | 126 | 6,7 | 15,9 | 185 | - | - | - | - | |
| Ln XMW 5004 An XMW 4024 | - | - | - | 3,7 | 10,6 | 114 | 4,9 | 14,8 | 140 | 7,0 | 12,7 | 198 | - | - | - | - | |
| SUQ 3126 | 1,0 | 29,0 | 90 | 2,1 | 100 | 119 | 3,0 | 126 | 140 | 4,1 | 140 | 181 | 1,0 | 0,7 | 250 | 3400 | |
| | 1,1 | 18,9 | 108 | 2,2 | 79,0 | 133 | 3,1 | 110 | 151 | 4,2 | 125 | 193 | 1,8 | 1,5 | 430 | 3800 | |
| | - | - | - | 2,4 | 62,0 | 147 | 3,2 | 95 | 163 | 4,6 | 89 | 225 | 2,4 | 2,0 | 460 | 4300 | |
| | - | - | - | 2,5 | 48,0 | 162 | 3,4 | 78 | 184 | 4,9 | 58 | 265 | 3,4 | 3,0 | 530 | 4600 | |
| | - | - | - | 2,7 | 36,0 | 177 | 3,5 | 62 | 193 | 5,3 | 34 | 305 | 4,9 | 4,0 | 580 | 5200 | |
| | - | - | - | - | - | - | 3,7 | 48 | 210 | 5,6 | 16,7 | 340 | - | - | - | - | |
| Ln XMW 5005 An XMW 4025 | - | - | - | - | - | 3,8 | 37 | 225 | - | - | - | - | - | - | - | - | |




ROUND AND FLAT SPRAYS

These set-ups are designed to work with a liquid fed out of an ambient pressure container, either by liquid siphoning or by gravity head. Therefore the performance tables give the water flow rate for both suction head (light blue background) and gravity head (white background).

The approximate spray depending upon set-up type and operating conditions are given from the table at the right.

- MATERIALS
- B1 AISI 303 STAINLESS STEEL
 - B31 AISI 316L STAINLESS STEEL
 - D1 PVC
 - T8 NICKEL PLATED BRASS

WH = Water capacity (l/hour)
AM = Air capacity (NL/min)

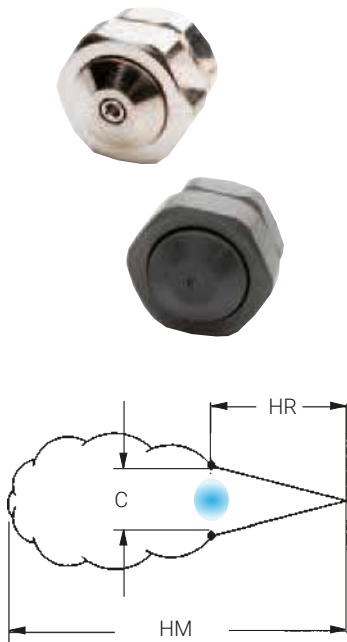

| SET-UP CODE | AIR PRESSURE (BAR) | | | | | | | | | | FULL CONE SPRAY | | | |
|-----------------|--------------------------|-----|------|------|------|------|------|------|------|-----|-----------------|-----|-----|------|
| | AIR CAPACITY (NL/MIN) | | | | | | | | | | PA | HR | C | HM |
| | LIQUID CAPACITY (L/HOUR) | | | | | | | | | | | | | |
| SUC 1120 | 0,7 | 11 | 1,5 | 1,3 | 1,1 | 0,9 | 0,7 | 0,5 | - | - | 0,7 | 280 | 89 | 1800 |
| Ln XMW 5006 | 1,5 | 17 | 1,8 | 1,7 | 1,5 | 1,3 | 1,2 | 1,1 | 0,6 | - | 1,5 | 280 | 89 | 1900 |
| An XMW 4040 | 3,0 | 28 | 2,1 | 1,9 | 1,7 | 1,5 | 1,4 | 1,3 | 1,1 | 0,8 | 3,0 | 300 | 95 | 2300 |
| | 4,0 | 36 | 2,2 | 2,0 | 1,8 | 1,6 | 1,5 | 1,4 | 1,2 | 0,9 | 4,0 | 360 | 114 | 2600 |
| SUC 1190 | 0,7 | 13 | 2,4 | 2,1 | 1,7 | 1,5 | 1,2 | 0,8 | - | - | 0,7 | 300 | 95 | 2100 |
| Ln XMW 5001 | 1,5 | 20 | 2,8 | 2,6 | 2,4 | 2,1 | 1,9 | 1,6 | 0,9 | - | 1,5 | 330 | 104 | 2300 |
| An XMW 4040 | 3,0 | 32 | 3,4 | 3,1 | 2,9 | 2,8 | 2,6 | 2,4 | 1,7 | 1,1 | 3,0 | 380 | 120 | 2600 |
| | 4,0 | 41 | 3,7 | 3,4 | 3,3 | 3,1 | 2,9 | 2,7 | 2,1 | 1,5 | 4,0 | 430 | 144 | 3000 |
| SUC 1200 | 0,7 | 23 | 2,5 | 2,3 | 2,0 | 1,6 | 1,4 | 1,1 | - | - | 0,7 | 300 | 95 | 2400 |
| Ln XMW 5001 | 1,5 | 36 | 2,9 | 2,8 | 2,5 | 2,2 | 2,0 | 1,7 | 0,9 | - | 1,5 | 330 | 104 | 2700 |
| An XMW 4041 | 3,0 | 58 | 3,4 | 3,3 | 3,2 | 2,9 | 2,8 | 2,5 | 1,9 | 1,2 | 3,0 | 380 | 127 | 3400 |
| | 4,0 | 74 | 3,7 | 3,6 | 3,5 | 3,4 | 3,3 | 3,0 | 2,5 | 2,0 | 4,0 | 430 | 151 | 4000 |
| SUC 1290 | 0,7 | 19 | 4,5 | 4,0 | 3,4 | 2,1 | 1,8 | 1,4 | - | - | 0,7 | 380 | 140 | 3000 |
| Ln XMW 5002 | 1,5 | 31 | 5,3 | 4,9 | 4,4 | 3,5 | 2,9 | 2,7 | 1,8 | - | 1,5 | 410 | 152 | 3400 |
| An XMW 4041 | 3,0 | 50 | 6,0 | 5,6 | 5,0 | 4,4 | 4,0 | 3,4 | 2,4 | 1,2 | 3,0 | 460 | 170 | 4000 |
| | 4,0 | 65 | 5,7 | 5,4 | 5,0 | 4,2 | 3,9 | 3,5 | 2,8 | 1,9 | 4,0 | 510 | 198 | 4600 |
| SUC 2105 | 1,5 | 58 | 22,0 | 19,9 | 16,3 | 12,3 | 10,5 | 8,3 | 2,8 | - | 1,5 | 460 | 137 | 3700 |
| Ln XMW 5004 | 3,0 | 88 | 25,0 | 23,0 | 19,5 | 16,7 | 14,2 | 11,5 | 6,4 | 2,8 | 3,0 | 510 | 161 | 4300 |
| An XMW 4042 | 4,0 | 111 | 26,0 | 24,0 | 21,0 | 18,4 | 15,7 | 12,9 | 7,9 | 4,5 | 4,0 | 530 | 168 | 4900 |
| | 5,6 | 147 | 26,0 | 24,0 | 22,0 | 19,7 | 17,0 | 14,6 | 9,8 | 6,1 | 5,6 | 580 | 194 | 5500 |
| SUC 2180 | 2,0 | 144 | - | - | - | 27,0 | 22,0 | 16,8 | - | - | 2,0 | 510 | 180 | 6700 |
| Ln XMW 5005 | 3,0 | 190 | - | - | - | 30,0 | 26,0 | 21,0 | - | - | 3,0 | 530 | 187 | 7000 |
| An XMW 4043 | 4,0 | 240 | 4,0 | 43,0 | 40,0 | 31,0 | 28,0 | 23,0 | 11,0 | - | 4,0 | 580 | 215 | 7600 |
| | 5,6 | 315 | 44,0 | 42,0 | 39,0 | 31,0 | 28,0 | 24,0 | 16,7 | 8,3 | 5,6 | 630 | 245 | 8200 |

| | | | | | | | |
|-------------------|-----|-----|-------------------|-----|-----|-----|-----|
| 450 | 300 | 150 | 100 | 200 | 300 | 600 | 900 |
| Gravity head (mm) | | | Suction head (mm) | | | | |




| SET-UP CODE | AIR PRESSURE (BAR) | | | | | | | | | | FLAT FAN SPRAY | | |
|-----------------|--------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|----------------|-----|------|
| | AIR CAPACITY (NL/MIN) | | | | | | | | | | PA | C | HM |
| | LIQUID CAPACITY (L/HOUR) | | | | | | | | | | | | |
| SUQ 0860 | 0,7 | 28 | 1,3 | 1,2 | 1,1 | 1,0 | 1,0 | 0,8 | 0,6 | 0,5 | 0,7 | 380 | 2100 |
| Ln XMW 5002 | 1,5 | 43 | 1,2 | 1,1 | 1,0 | 0,9 | 0,9 | 0,8 | 0,7 | 0,5 | 1,5 | 380 | 2100 |
| An XMW 4026 | 2,0 | 50 | 0,8 | 0,8 | 0,7 | 0,6 | 0,5 | - | - | - | 2,0 | 380 | 1800 |
| SUQ 1280 | 1,5 | 56 | 3,7 | 3,5 | 3,3 | 2,9 | 2,8 | 2,5 | 2,3 | 2,1 | 1,5 | 380 | 2700 |
| Ln XMW 5007 | 2,0 | 65 | 3,4 | 3,3 | 3,1 | 2,8 | 2,7 | 2,6 | 2,4 | 2,2 | 2,0 | 420 | 2700 |
| An XMW 4027 | 3,0 | 87 | 2,8 | 2,7 | 2,5 | 2,4 | 2,2 | 2,1 | 1,9 | 1,7 | 3,0 | 460 | 3000 |
| | 4,0 | 110 | 1,9 | 1,8 | 1,6 | 1,5 | 1,3 | 1,2 | - | - | 4,0 | 480 | 2700 |
| SUQ 1370 | 1,5 | 68 | 5,1 | 4,8 | 4,5 | 3,8 | 3,7 | 3,5 | 3,0 | 2,4 | 1,5 | 270 | 3400 |
| Ln XMW 5003 | 2,0 | 78 | 4,9 | 4,7 | 4,4 | 3,6 | 3,4 | 3,2 | 2,9 | 2,3 | 2,0 | 280 | 3400 |
| An XMW 4028 | 3,0 | 103 | 3,4 | 3,2 | 3,0 | 2,2 | 2,0 | 1,7 | - | - | 3,0 | 300 | 3000 |
| | 3,5 | 117 | 2,2 | 2,0 | 1,7 | - | - | - | - | - | - | - | - |
| SUQ 1540 | 1,5 | 63 | 7,6 | 7,2 | 6,6 | 5,7 | 5,4 | 5,1 | 4,6 | 3,7 | 1,5 | 270 | 3400 |
| Ln XMW 5003 | 2,0 | 73 | 7,6 | 7,3 | 6,8 | 5,9 | 5,7 | 5,5 | 5,0 | 4,2 | 2,0 | 290 | 3400 |
| An XMW 4029 | 3,0 | 96 | 6,4 | 6,1 | 5,7 | 5,0 | 4,5 | 4,1 | 3,3 | - | 3,0 | 330 | 3400 |
| | 3,5 | 110 | 4,2 | 3,7 | 3,2 | 2,6 | - | - | - | - | - | - | - |

| | | | | | | | |
|-------------------|-----|-----|-------------------|-----|-----|-----|-----|
| 450 | 300 | 150 | 100 | 200 | 300 | 600 | 900 |
| Gravity head (mm) | | | Suction head (mm) | | | | |

FLAT FAN SPRAY

These set-ups are designed in order to have two different paths for air and liquid, and to eject them through different orifices, so that the atomized spray is produced from their impact in the immediate surroundings of the orifices. It is possible therefore to atomize viscous liquids as well as any liquid which might originate a solid build up in the mixing chamber of an ordinary internal mix atomizer. In addition liquid and air pressure can be adjusted independently from each other, which allows for an easy steady state atomizer regulation. The approximate spray depending upon set-up type and operating conditions are given from the table at the right.

- MATERIALS
 B1 AISI 303 STAINLESS STEEL
 B31 AISI 316L STAINLESS STEEL
 D1 PVC
 T8 NICKEL PLATED BRASS

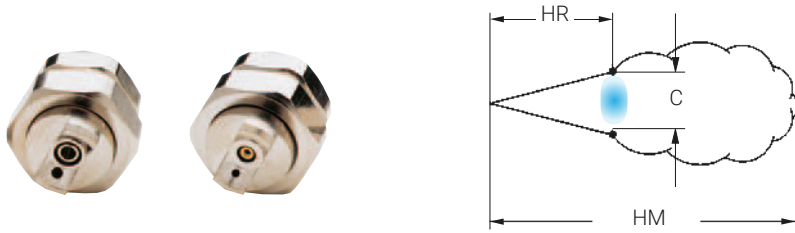


WH = Water capacity (l/hour)
 AM = Air capacity (NI/min)

| SET-UP CODE | AIR PRESSURE (BAR) | | | | | | | | | | | | | | | | | | | | | | |
|---|---|------|-----|-----|------|-----|-----|------|-----|-----|------|-----|-----|------|-----|-----|-----|-----|-----|-----|------|------|-----|
| | 0,2 | | 0,3 | | 0,7 | | 1,5 | | 3,0 | | WH | AM | PA | PL | C | HM | HR | | | | | | |
| SUL 2110 Ln XMW 5006 An XMW 4030 | 0,2 | | 25 | 0,4 | | 26 | 0,7 | | 31 | 1,1 | | 40 | 1,8 | | 45 | 2,8 | | 74 | 0,2 | 0,2 | 230 | 900 | 150 |
| | 0,4 | | 26 | 0,7 | | 31 | 1,1 | | 40 | 1,8 | | 54 | 3,5 | | 60 | 4,2 | | 102 | 1,1 | 0,2 | 230 | 1200 | 150 |
| | 0,7 | | 31 | 1,1 | | 40 | 1,4 | | 45 | 2,1 | | 60 | 4,2 | | 74 | 4,9 | | 119 | 1,4 | 0,4 | 230 | 1200 | 150 |
| | 1,1 | 2,8 | 40 | 1,4 | 3,5 | 45 | 1,8 | 5,3 | 54 | 2,8 | 7,8 | 74 | 4,9 | 11 | 119 | 1,4 | 1,4 | 250 | 1,4 | 1,4 | 250 | 1500 | 180 |
| | 1,4 | | 45 | 1,8 | | 54 | 2,1 | | 59 | 3,5 | | 85 | 5,3 | | 128 | 1,8 | 0,7 | 240 | 1,8 | 0,7 | 240 | 1500 | 150 |
| | 1,8 | | 54 | 2,1 | | 59 | 2,8 | | 74 | 4,2 | | 102 | 5,6 | | 139 | 2,8 | 1,4 | 280 | 2,8 | 1,4 | 280 | 1800 | 180 |
| 2,1 | | 59 | 2,8 | | 74 | 3,5 | | 85 | 5,6 | | 139 | 6,3 | | 159 | 4,9 | 2,8 | 240 | 4,9 | 2,8 | 240 | 2400 | 180 | |
| SUT 2111 Ln XMW 5006 An XMW 4031 | 0,4 | | 22 | 0,4 | | 22 | 0,4 | | 25 | 0,6 | | 28 | 0,7 | | 34 | 1,1 | | 34 | 0,6 | 0,7 | 400 | 1800 | 300 |
| | 0,5 | 2,8 | 25 | 0,5 | 3,5 | 25 | 0,6 | 5,3 | 28 | 0,7 | 7,8 | 34 | 1,1 | 11 | 45 | 1,1 | 45 | 0,6 | 1,5 | 460 | 1800 | 350 | |
| | 0,5 | | 27 | 0,6 | | 28 | 0,7 | | 34 | 1,1 | | 45 | 1,8 | | 62 | 1,4 | 1,5 | 410 | 1,4 | 1,5 | 410 | 2700 | 300 |
| | 0,6 | | 28 | 0,7 | | 34 | 0,9 | | 40 | 1,4 | | 54 | 2,5 | | 79 | 1,1 | 2,0 | 480 | 1,1 | 2,0 | 480 | 2600 | 350 |
| | SUR 2166 Ln XMW 5001 An XMW 4030 | 0,4 | | 26 | 0,7 | | 31 | 1,1 | | 40 | 1,8 | | 54 | 3,2 | | 82 | | 82 | 0,4 | 0,2 | 220 | 1000 | 140 |
| 0,7 | | | 31 | 1,1 | | 40 | 1,4 | | 45 | 2,1 | | 59 | 3,5 | | 85 | | 85 | 1,4 | 0,2 | 220 | 1700 | 150 | |
| 1,1 | | | 40 | 1,4 | | 45 | 1,8 | | 54 | 2,8 | | 74 | 4,2 | | 102 | | 102 | 1,8 | 0,4 | 230 | 1800 | 165 | |
| 1,4 | | 4,5 | 45 | 1,8 | 5,5 | 54 | 2,1 | 8,3 | 59 | 3,5 | 12,2 | 85 | 4,9 | 16,6 | 119 | 1,8 | 1,4 | 290 | 2,1 | 1,4 | 290 | 2100 | 190 |
| 1,8 | | | 54 | 2,1 | | 59 | 2,8 | | 74 | 4,2 | | 102 | 5,3 | | 127 | 2,1 | 0,7 | 250 | 2,1 | 0,7 | 250 | 1800 | 180 |
| 2,1 | | | 59 | 2,8 | | 74 | 3,5 | | 85 | 4,9 | | 119 | 6,3 | | 159 | 3,5 | 1,4 | 300 | 3,5 | 1,4 | 300 | 2400 | 220 |
| 2,8 | | 74 | 3,5 | | 85 | 4,2 | | 102 | 6,3 | | 159 | 6,7 | | 164 | 5,3 | 2,8 | 250 | 5,3 | 2,8 | 250 | 3000 | 190 | |
| SUV 2172 Ln XMW 5001 An XMW 4031 | 0,4 | | 22 | 0,4 | | 22 | 0,6 | | 28 | 0,7 | | 34 | 1,1 | | 45 | | 45 | 0,7 | 1,5 | 580 | 1800 | 460 | |
| | 0,6 | 4,5 | 28 | 0,7 | 5,5 | 34 | 0,7 | 8,3 | 34 | 1,4 | 12,2 | 54 | 1,4 | 17,2 | 54 | 1,4 | 54 | 1,4 | 1,5 | 560 | 2400 | 430 | |
| | 0,7 | | 34 | 1,1 | | 45 | 1,4 | | 54 | 2,1 | | 71 | 2,1 | | 71 | 2,1 | 71 | 1,8 | 2,0 | 580 | 2700 | 460 | |
| | 1,1 | | 45 | 1,4 | | 54 | 2,1 | | 71 | 2,5 | | 79 | 2,5 | | 79 | 2,5 | 79 | 1,8 | 3,0 | 660 | 2900 | 480 | |
| | SUS 2330 Ln XMW 5002 An XMW 4030 | 0,7 | | 31 | 1,1 | | 40 | 1,4 | | 45 | 2,5 | | 68 | 3,5 | | 85 | | 85 | 0,7 | 0,2 | 250 | 1200 | 165 |
| 1,1 | | | 40 | 1,4 | | 45 | 1,8 | | 54 | 2,8 | | 74 | 4,2 | | 102 | | 102 | 1,8 | 0,2 | 250 | 1800 | 165 | |
| 1,4 | | | 45 | 1,8 | | 54 | 2,1 | | 59 | 3,5 | | 85 | 4,9 | | 119 | | 119 | 2,1 | 0,4 | 240 | 1800 | 180 | |
| 1,8 | | 8,5 | 54 | 2,1 | 10,4 | 59 | 2,8 | 15,9 | 74 | 4,2 | 23 | 102 | 5,3 | 33 | 127 | 2,5 | 1,4 | 320 | 2,5 | 1,4 | 320 | 1800 | 200 |
| 2,1 | | | 59 | 2,8 | | 74 | 3,5 | | 85 | 4,9 | | 119 | 5,6 | | 139 | | 139 | 2,8 | 0,7 | 300 | 2300 | 190 | |
| 2,8 | | | 74 | 3,5 | | 85 | 4,2 | | 102 | 5,6 | | 139 | 6,3 | | 159 | 4,2 | 1,4 | 360 | 4,2 | 1,4 | 360 | 3000 | 200 |
| 3,5 | | 85 | 4,2 | | 102 | 4,9 | | 119 | 6,3 | | 159 | 7,0 | | 176 | 5,3 | 2,8 | 300 | 5,3 | 2,8 | 300 | 4000 | 200 | |
| SUV 2331 Ln XMW 5002 An XMW 4031 | 0,4 | | 25 | 0,4 | | 25 | 0,4 | | 25 | 0,7 | | 34 | 1,4 | | 54 | | 54 | 0,6 | 0,7 | 630 | 1500 | 480 | |
| | 0,5 | 8,5 | 27 | 0,6 | 10,4 | 28 | 0,6 | 15,9 | 28 | 0,9 | 23 | 40 | 1,8 | 33 | 62 | 0,7 | 1,5 | 630 | 0,7 | 1,5 | 630 | 1800 | 480 |
| | 0,6 | | 28 | 0,7 | | 31 | 0,7 | | 34 | 1,1 | | 45 | 2,1 | | 71 | 1,4 | 1,5 | 660 | 1,4 | 1,5 | 660 | 2400 | 530 |
| | 0,7 | | 34 | 0,8 | | 34 | 0,9 | | 40 | 1,4 | | 54 | 2,5 | | 79 | 1,8 | 2,0 | 690 | 1,8 | 2,0 | 690 | 2700 | 510 |
| | SUQ 2520 Ln XMW 5007 An XMW 4032 | 0,7 | | 85 | 1,0 | | 102 | 1,4 | | 116 | 2,5 | | 178 | 3,2 | | 212 | | 212 | 0,7 | 0,2 | 250 | 1700 | 190 |
| 1,0 | | | 102 | 1,4 | | 116 | 1,8 | | 139 | 2,8 | | 195 | 3,5 | | 232 | | 232 | 1,8 | 0,2 | 250 | 2700 | 190 | |
| 1,4 | | | 116 | 1,8 | | 139 | 2,1 | | 156 | 3,5 | | 227 | 3,9 | | 255 | | 255 | 2,1 | 0,4 | 280 | 3000 | 190 | |
| 1,8 | | 13,4 | 139 | 2,1 | 16,4 | 156 | 2,5 | 25 | 178 | 4,2 | 37 | 266 | 4,2 | 52 | 275 | 2,5 | 0,7 | 280 | 2,5 | 0,7 | 280 | 3500 | 220 |
| 2,1 | | | 156 | 2,8 | | 195 | 2,8 | | 195 | 4,9 | | 312 | 4,9 | | 314 | 2,5 | 1,4 | 360 | 2,5 | 1,4 | 360 | 3700 | 230 |
| 2,8 | | | 195 | 3,5 | | 227 | 3,5 | | 227 | 5,6 | | 360 | 5,6 | | 360 | 4,2 | 1,4 | 370 | 4,2 | 1,4 | 370 | 4300 | 230 |
| 3,5 | | 227 | 4,2 | | 266 | 4,2 | | 266 | 6,3 | | 411 | 6,3 | | 411 | 4,9 | 2,8 | 320 | 4,9 | 2,8 | 320 | 4900 | 220 | |
| SUV 2521 Ln XMW 5007 An XMW 4033 | 0,6 | | 91 | 0,7 | | 102 | 1,4 | | 156 | 2,1 | | 210 | 3,2 | | 285 | | 285 | 2,1 | 0,7 | 560 | 4300 | 400 | |
| | 0,7 | 13,4 | 102 | 1,1 | 16,4 | 130 | 2,1 | 25 | 210 | 2,8 | 37 | 260 | 4,2 | 52 | 360 | 2,1 | 1,5 | 580 | 2,1 | 1,5 | 580 | 4000 | 460 |
| | 1,1 | | 130 | 1,8 | | 184 | 2,5 | | 235 | 3,5 | | 310 | 5,3 | | 430 | 4,2 | 1,5 | 640 | 4,2 | 1,5 | 640 | 5200 | 480 |
| | 1,4 | | 156 | 2,1 | | 210 | 2,8 | | 260 | 4,2 | | 360 | 5,6 | | 455 | 3,9 | 2,0 | 690 | 3,9 | 2,0 | 690 | 4600 | 510 |



FLAT FAN SPRAY

| SET-UP CODE | AIR PRESSURE (BAR) | | | | | | | | | | | | | | | | | | | |
|-----------------|--------------------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|
| | WH | | AM | | WH | | AM | | WH | | AM | | WH | | AM | | PA | PL | C | HM |
| SUT 2680 | 0,7 | | 85 | 1,4 | | 116 | 1,8 | | 139 | 2,1 | | 195 | 3,5 | | 232 | 0,7 | 0,4 | 270 | 2100 | 190 |
| | 1,0 | | 102 | 1,8 | | 139 | 2,1 | | 156 | 2,5 | | 212 | 4,2 | | 275 | 1,8 | 0,7 | 270 | 3000 | 190 |
| | 1,4 | | 116 | 2,1 | | 156 | 2,5 | | 178 | 2,8 | | 227 | 4,9 | | 314 | 2,5 | 1,4 | 330 | 3400 | 220 |
| | 1,8 | 17,6 | 139 | 2,5 | 22 | 178 | 2,8 | 33 | 195 | 4,2 | 48 | 266 | 5,3 | 68 | 340 | 2,8 | 1,4 | 360 | 3800 | 220 |
| | 2,1 | | 156 | 2,8 | | 195 | 3,5 | | 227 | 4,9 | | 312 | 5,6 | | 360 | 2,8 | 1,4 | 370 | 4000 | 250 |
| Ln XMW 5003 | 2,8 | | 195 | 3,5 | | 227 | 4,2 | | 266 | 5,6 | | 360 | 6,3 | | 411 | 4,2 | 2,1 | 370 | 4900 | 250 |
| An XMW 4032 | 3,5 | | 227 | 4,2 | | 266 | 4,9 | | 312 | 6,3 | | 411 | 6,6 | | 428 | 5,3 | 2,8 | 360 | 5800 | 230 |
| SUV 2681 | 0,6 | | 91 | 0,7 | | 102 | 1,1 | | 130 | 2,5 | | 235 | 3,5 | | 310 | 1,8 | 0,7 | 640 | 3000 | 480 |
| | 1,1 | 17,6 | 130 | 1,4 | 22 | 156 | 1,8 | 33 | 184 | 3,2 | 48 | 285 | 4,6 | 68 | 380 | 2,5 | 1,5 | 640 | 3800 | 460 |
| | 1,4 | | 156 | 1,8 | | 184 | 2,5 | | 235 | 3,9 | | 330 | 6,0 | | 475 | 4,2 | 1,5 | 580 | 4900 | 430 |
| | 1,8 | | 184 | 2,1 | | 210 | 2,8 | | 260 | 4,2 | | 360 | 6,7 | | 525 | 4,2 | 2,0 | 610 | 5200 | 430 |
| SUN 3101 | 1,0 | | 102 | 1,8 | | 139 | 2,5 | | 178 | 3,2 | | 212 | 3,9 | | 255 | 1,0 | 0,2 | 250 | 2700 | 200 |
| | 1,4 | | 116 | 2,1 | | 156 | 2,8 | | 195 | 3,5 | | 227 | 4,2 | | 275 | 2,1 | 0,2 | 290 | 3000 | 220 |
| | 1,8 | | 139 | 2,5 | | 178 | 3,2 | | 212 | 3,9 | | 246 | 4,6 | | 297 | 2,8 | 0,4 | 360 | 3500 | 240 |
| | 2,1 | 36 | 156 | 2,8 | 45 | 195 | 3,5 | 68 | 227 | 4,2 | 100 | 266 | 4,9 | 141 | 314 | 3,2 | 1,4 | 390 | 3700 | 280 |
| | 2,5 | | 178 | 3,2 | | 212 | 4,2 | | 266 | 4,9 | | 312 | 5,6 | | 360 | 3,5 | 0,7 | 380 | 4000 | 270 |
| | 2,8 | | 195 | 3,5 | | 227 | 4,9 | | 312 | 5,6 | | 360 | 6,3 | | 411 | 4,2 | 1,4 | 390 | 4800 | 280 |
| | An XMW 4032 | 3,5 | | 227 | 4,2 | | 266 | 5,6 | | 360 | 6,3 | | 411 | 7,0 | | 453 | 5,6 | 2,8 | 380 | 5900 |
| SUN 3102 | 1,8 | | 235 | 1,8 | | 235 | 2,5 | | 300 | 3,9 | | 410 | | | 1,8 | 0,2 | 290 | 3000 | 200 | |
| | 2,1 | | 260 | 2,1 | | 260 | 2,8 | | 330 | 4,2 | | 445 | | | 2,8 | 0,2 | 300 | 3400 | 200 | |
| | 2,5 | | 300 | 2,5 | | 300 | 3,2 | | 355 | 4,6 | | 480 | | | 2,8 | 0,3 | 300 | 4000 | 200 | |
| | 2,8 | 36 | 330 | 2,8 | 45 | 330 | 3,5 | 68 | 380 | 4,9 | 100 | 529 | | | 3,5 | 0,7 | 320 | 4300 | 220 | |
| | 3,2 | | 355 | 3,2 | | 355 | 3,9 | | 410 | 5,3 | | 565 | | | 3,9 | 1,5 | 340 | 4600 | 220 | |
| | 3,5 | | 380 | 3,5 | | 380 | 4,2 | | 445 | 5,6 | | 600 | | | 4,2 | 1,0 | 330 | 4700 | 230 | |
| | An XMW 4034 | 4,2 | | 445 | 4,2 | | 445 | 4,9 | | 520 | 6,3 | | 685 | | | 4,9 | 1,5 | 340 | 5500 | 230 |
| SUW 3141 | 0,7 | | 102 | 1,1 | | 130 | 1,8 | | 184 | 3,2 | | 285 | 5,3 | | 430 | 2,8 | 0,7 | 810 | 4000 | 580 |
| | 1,1 | 36 | 130 | 1,4 | 45 | 156 | 2,1 | 68 | 210 | 3,5 | 100 | 310 | 6,0 | 141 | 475 | 3,2 | 1,5 | 790 | 4300 | 580 |
| | 1,4 | | 156 | 2,1 | | 210 | 2,8 | | 260 | 4,9 | | 405 | 6,7 | | 525 | 5,6 | 1,5 | 660 | 5800 | 510 |
| | 1,8 | | 184 | 2,5 | | 235 | 3,2 | | 285 | 5,9 | | 455 | 7,0 | | 550 | 3,9 | 2,0 | 840 | 4300 | 640 |
| | SUN 3175 | 2,1 | | 260 | 2,8 | | 330 | 3,9 | | 410 | 4,9 | | 520 | | | 2,1 | 0,2 | 340 | 3500 | 240 |
| 2,5 | | | 300 | 3,2 | | 355 | 4,2 | | 445 | 5,3 | | 565 | | | 3,2 | 0,2 | 360 | 4300 | 240 | |
| 2,8 | | | 330 | 3,5 | | 380 | 4,6 | | 480 | 5,6 | | 600 | | | 3,9 | 0,3 | 360 | 4900 | 250 | |
| 3,2 | | 64 | 355 | 3,9 | 78 | 410 | 4,9 | 119 | 520 | 6,0 | 175 | 640 | | | 4,9 | 0,7 | 360 | 5500 | 250 | |
| 3,5 | | | 380 | 4,2 | | 445 | 5,3 | | 565 | 6,3 | | 685 | | | 4,9 | 1,5 | 380 | 5500 | 250 | |
| 4,2 | | | 445 | 4,9 | | 520 | 5,6 | | 600 | 6,3 | | | | | 5,3 | 1,0 | 380 | 5800 | 250 | |
| An XMW 4034 | | 4,9 | | 520 | 5,6 | | 600 | 6,3 | | 685 | | | | | 5,6 | 1,5 | 380 | 6100 | 250 | |
| SUN 3280 | 2,8 | | 330 | 3,5 | | 380 | 4,6 | | 480 | 5,6 | | 600 | | | 2,8 | 0,2 | 360 | 4600 | 250 | |
| | 3,2 | | 355 | 3,9 | | 410 | 4,9 | | 520 | 6,0 | | 640 | | | 3,9 | 0,2 | 370 | 4900 | 250 | |
| | 3,5 | | 380 | 4,2 | | 445 | 5,3 | | 565 | 6,3 | | 685 | | | 4,6 | 0,3 | 370 | 5200 | 250 | |
| | 3,9 | 102 | 410 | 4,6 | 125 | 480 | 5,6 | 192 | 600 | | 280 | | | | 5,3 | 0,7 | 380 | 5500 | 270 | |
| | 4,2 | | 445 | 4,9 | | 520 | 6,0 | | 640 | | | | | | 5,6 | 1,0 | 410 | 5500 | 270 | |
| | 4,6 | | 480 | 5,3 | | 565 | 6,3 | | 685 | | | | | | 5,6 | 1,5 | 410 | 5800 | 270 | |
| | An XMW 4034 | 4,9 | | 520 | 5,6 | | 600 | 6,3 | | 685 | | | | | 6,0 | 1,5 | 410 | 6100 | 270 | |



FULL CONE SPRAY

The new SUF external mixing spray set-up for pneumatic atomizer produces a full cone spray, combining compressed air and liquid at the nozzle outlet.

The spray set-up design allows for separate air and liquid pressure adjustment to be atomized, ensuring independent control.

In external mixing atomiser set-ups, the two fluids (air and liquid) are expelled through separate orifices and mixed outside the nozzle. This allows for easier cleaning in case of deposits or buildup.

The main advantages of this set-up are:


1. They can spray more viscous liquids, such as oil, preventing uncontrolled product atomization.
2. The geometry of these devices makes them less prone to clogging.

MATERIALS B1 AISI 303 STAINLESS STEEL
 B31 AISI 316L STAINLESS STEEL
 T8 NICKEL PLATED BRASS

Water capacity (l/h): min 2,5 = max = 143,8
 Air capacity (Nm³/h): min 60 = max= 551,6



| CODE | SET-UP | QW [lpm]@3bar | QA [Nm ³ /h]@3bar | α [deg] | CONNECTION |
|-----------------|--|------------------|---------------------------------|------------|----------------|
| SUF 0163 | Ln XMW 5006 An XMW 4060 | 0,163 | 14,0 | 30° | 3/8 - 24 - UNF |
| SUF 0248 | Ln XMW 5001 An XMW 4060 | 0,248 | 14,0 | 30° | 3/8 - 24 - UNF |
| SUF 0527 | Ln XMW 5002 An XMW 4060 | 0,527 | 14,0 | 30° | 3/8 - 24 - UNF |
| SUF 0875 | Ln XMW 5007 An XMW 4061 | 0,875 | 17,0 | 30° | 3/8 - 24 - UNF |
| SUF 0985 | Ln XMW 5003 An XMW 4061 | 0,985 | 17,0 | 30° | 3/8 - 24 - UNF |
| SUF 1239 | Ln XMW 5004 An XMW 4061 | 1,239 | 17,0 | 30° | 3/8 - 24 - UNF |



Water capacity (l/h): min 2,5 = max = 143,8
 Air capacity (Nm³/h): min 60 = max= 551,6



| SUF 0163 Ln XMW 5006 An XMW 4060 | | | | | | | | | |
|-------------------------------------|-------------------------|---------------------------|-------------------------|--|----------------------------|------------|-----------|-----------|-----------|
| PRESSURE | | PERFORMANCES | | | | COVERAGE | | | |
| P _w [bar] | P _A [bar] | Q _w [l/min] | Q _w [l/h] | Q _A [Nm ³ /h] | Q _A [NI/min] | α [deg] | A [mm] | B [mm] | C [mm] |
| 0,2 | 0,35 | 0,042 | 2,52 | 3,6 | 60,0 | 30° | 400 | 1700 | 215 |
| | 0,40 | | | 3,8 | 63,3 | 30° | 400 | 1800 | 215 |
| | 0,50 | | | 4,3 | 71,6 | 30° | 450 | 1850 | 240 |
| | 0,60 | | | 4,8 | 80,8 | 30° | 450 | 1900 | 240 |
| 0,3 | 0,35 | 0,051 | 3,06 | 3,6 | 60,0 | 30° | 400 | 1700 | 215 |
| | 0,40 | | | 3,8 | 63,3 | 30° | 400 | 1800 | 215 |
| | 0,50 | | | 4,3 | 71,6 | 30° | 450 | 1850 | 240 |
| | 0,70 | | | 5,3 | 88,3 | 30° | 450 | 1900 | 240 |
| 0,7 | 0,40 | 0,078 | 4,68 | 3,8 | 63,3 | 30° | 400 | 1850 | 215 |
| | 0,60 | | | 4,8 | 80,8 | 30° | 450 | 1950 | 240 |
| | 0,70 | | | 5,3 | 88,3 | 30° | 500 | 2000 | 270 |
| | 0,85 | | | 6,0 | 100,0 | 30° | 550 | 2050 | 295 |
| 1,5 | 0,60 | 0,115 | 6,90 | 4,8 | 80,8 | 30° | 450 | 1950 | 240 |
| | 0,70 | | | 5,3 | 88,3 | 30° | 500 | 2000 | 270 |
| | 1,10 | | | 7,0 | 116,6 | 30° | 550 | 2400 | 295 |
| | 1,40 | | | 8,1 | 135,0 | 30° | 550 | 2050 | 295 |
| 3,0 | 0,70 | 0,163 | 9,78 | 5,3 | 88,3 | 30° | 450 | 2100 | 240 |
| | 1,10 | | | 7,0 | 116,6 | 30° | 500 | 2400 | 270 |
| | 1,80 | | | 9,6 | 160,0 | 30° | 550 | 2800 | 295 |
| | 2,50 | | | 12,1 | 201,6 | 30° | 550 | 3000 | 295 |
| | 3,00 | | | 14,0 | 233,3 | 30° | 550 | 3200 | 295 |

| SUF 0248 Ln XMW 5001 An XMW 4060 | | | | | | | | | |
|-------------------------------------|-------------------------|---------------------------|-------------------------|--|----------------------------|------------|-----------|-----------|-----------|
| PRESSURE | | PERFORMANCES | | | | COVERAGE | | | |
| P _w [bar] | P _A [bar] | Q _w [l/min] | Q _w [l/h] | Q _A [Nm ³ /h] | Q _A [NI/min] | α [deg] | A [mm] | B [mm] | C [mm] |
| 0,2 | 0,35 | 0,064 | 3,84 | 3,6 | 60,0 | 30 | 400 | 1700 | 215 |
| | 0,60 | | | 4,8 | 80,8 | 30 | 400 | 1900 | 215 |
| | 0,70 | | | 5,3 | 88,3 | 30 | 450 | 1950 | 240 |
| | 1,10 | | | 7,0 | 116,6 | 30 | 450 | 2000 | 240 |
| 0,3 | 0,35 | 0,078 | 4,68 | 3,6 | 60,0 | 30 | 400 | 1750 | 215 |
| | 0,70 | | | 5,3 | 88,3 | 30 | 400 | 1900 | 215 |
| | 1,10 | | | 7,0 | 116,6 | 30 | 450 | 2000 | 240 |
| | 1,40 | | | 8,1 | 135,0 | 30 | 450 | 2050 | 240 |
| 0,7 | 0,60 | 0,119 | 7,14 | 4,8 | 80,8 | 30 | 400 | 2000 | 215 |
| | 0,70 | | | 5,3 | 88,3 | 30 | 450 | 2100 | 240 |
| | 1,40 | | | 8,1 | 135,0 | 30 | 500 | 2400 | 270 |
| | 2,10 | | | 10,7 | 178,3 | 30 | 550 | 2600 | 295 |
| 1,5 | 0,70 | 0,174 | 10,44 | 5,3 | 88,3 | 30 | 450 | 2400 | 240 |
| | 1,40 | | | 8,1 | 135,0 | 30 | 500 | 2600 | 270 |
| | 2,10 | | | 10,7 | 178,3 | 30 | 550 | 2800 | 295 |
| | 2,50 | | | 12,1 | 201,6 | 30 | 550 | 3000 | 295 |
| 3,0 | 1,10 | 0,248 | 14,88 | 7,0 | 116,6 | 30 | 450 | 2600 | 240 |
| | 1,40 | | | 8,1 | 135,0 | 30 | 500 | 2800 | 270 |
| | 2,10 | | | 10,7 | 178,3 | 30 | 550 | 3000 | 295 |
| | 2,50 | | | 12,1 | 201,6 | 30 | 550 | 3200 | 295 |
| | 3,00 | | | 14,1 | 235 | 30 | 550 | 3400 | 295 |

Water capacity (l/h): min 2,5 = max = 143,8
 Air capacity (Nm³/h): min 60 = max= 551,6



| SUF 0527 Ln XMW 5002 An XMW 4060 | | | | | | | | | |
|----------------------------------|-------------------------|---------------------------|-------------------------|--|----------------------------|------------|-----------|-----------|-----------|
| PRESSURE | | PERFORMANCES | | | | COVERAGE | | | |
| P _w [bar] | P _A [bar] | Q _w [l/min] | Q _w [l/h] | Q _A [Nm ³ /h] | Q _A [NI/min] | α [deg] | A [mm] | B [mm] | C [mm] |
| 0,2 | 0,40 | 0,138 | 8,28 | 3,8 | 63,3 | 30 | 400 | 1400 | 215 |
| | 0,50 | | | 4,3 | 71,6 | 30 | 400 | 1450 | 215 |
| | 0,60 | | | 4,8 | 71,6 | 30 | 450 | 1500 | 240 |
| | 0,70 | | | 5,3 | 88,3 | 30 | 450 | 1550 | 240 |
| 0,3 | 0,40 | 0,168 | 10,08 | 3,8 | 63,3 | 30 | 400 | 1650 | 215 |
| | 0,60 | | | 4,8 | 80,0 | 30 | 400 | 1700 | 215 |
| | 0,65 | | | 4,9 | 81,6 | 30 | 450 | 1750 | 240 |
| | 0,70 | | | 5,3 | 88,3 | 30 | 450 | 1800 | 240 |
| 0,7 | 0,40 | 0,251 | 15,06 | 3,8 | 63,3 | 30 | 400 | 1700 | 215 |
| | 0,60 | | | 4,8 | 80,0 | 30 | 450 | 1750 | 240 |
| | 0,70 | | | 5,3 | 88,3 | 30 | 500 | 1800 | 270 |
| | 0,85 | | | 5,9 | 98,3 | 30 | 500 | 1850 | 270 |
| 1,5 | 0,70 | 0,368 | 22,08 | 5,3 | 88,3 | 30 | 450 | 1950 | 240 |
| | 0,85 | | | 5,9 | 98,3 | 30 | 500 | 2100 | 270 |
| | 1,10 | | | 7,0 | 116,6 | 30 | 550 | 2150 | 295 |
| | 1,40 | | | 8,1 | 135,0 | 30 | 550 | 2200 | 295 |
| 3,0 | 1,40 | 0,527 | 31,62 | 8,1 | 135,0 | 30 | 450 | 2000 | 240 |
| | 1,80 | | | 9,6 | 160,0 | 30 | 500 | 2000 | 270 |
| | 2,10 | | | 10,7 | 178,3 | 30 | 500 | 2050 | 270 |
| | 2,50 | | | 12,1 | 201,6 | 30 | 550 | 2150 | 295 |
| | 3,00 | | | 14,0 | 233,3 | 30 | 550 | 2250 | 295 |

| SUF 0875 Ln XMW 5007 An XMW 4061 | | | | | | | | | |
|----------------------------------|-------------------------|---------------------------|-------------------------|--|----------------------------|------------|-----------|-----------|-----------|
| PRESSURE | | PERFORMANCES | | | | COVERAGE | | | |
| P _w [bar] | P _A [bar] | Q _w [l/min] | Q _w [l/h] | Q _A [Nm ³ /h] | Q _A [NI/min] | α [deg] | A [mm] | B [mm] | C [mm] |
| 0,2 | 0,60 | 0,235 | 14,1 | 6,0 | 100,0 | 30 | 400 | 2100 | 215 |
| | 0,70 | | | 6,5 | 108,3 | 30 | 450 | 2200 | 240 |
| | 1,10 | | | 8,5 | 141,6 | 30 | 450 | 2250 | 240 |
| | 1,40 | | | 9,9 | 165,0 | 30 | 500 | 2300 | 255 |
| 0,3 | 0,70 | 0,285 | 17,1 | 6,5 | 108,3 | 30 | 400 | 2300 | 215 |
| | 1,10 | | | 8,5 | 141,6 | 30 | 450 | 2400 | 240 |
| | 1,80 | | | 11,7 | 295,0 | 30 | 500 | 2600 | 255 |
| | 2,10 | | | 13,0 | 216,6 | 30 | 500 | 2800 | 255 |
| 0,7 | 1,40 | 0,435 | 26,1 | 9,9 | 165,0 | 30 | 450 | 3100 | 240 |
| | 2,10 | | | 13,0 | 216,6 | 30 | 450 | 3500 | 240 |
| | 2,50 | | | 14,8 | 246,6 | 30 | 500 | 3800 | 255 |
| | 2,80 | | | 16,1 | 268,3 | 30 | 500 | 4100 | 255 |
| 1,5 | 2,10 | 0,631 | 37,9 | 13,0 | 216,6 | 30 | 450 | 3200 | 240 |
| | 2,80 | | | 16,1 | 268,3 | 30 | 450 | 3700 | 240 |
| | 3,50 | | | 19,0 | 316,6 | 30 | 500 | 4100 | 255 |
| | 4,20 | | | 22,4 | 373,3 | 30 | 500 | 4300 | 255 |
| 3,0 | 3,00 | 0,875 | 52,5 | 17,0 | 283,3 | 30 | 450 | 4100 | 240 |
| | 3,20 | | | 17,7 | 295,0 | 30 | 450 | 4300 | 240 |
| | 4,20 | | | 22,4 | 373,3 | 30 | 500 | 4500 | 255 |
| | 5,30 | | | 26,8 | 446,6 | 30 | 500 | 4800 | 255 |
| | 5,60 | | | 28,7 | 478,3 | 30 | 500 | 5000 | 255 |

Water capacity (l/h): min 2,5 = max = 143,8
 Air capacity (Nm³/h): min 60 = max= 551,6



| SUF 0985 Ln XMW 5003 An XMW 4061 | | | | | | | | | |
|-------------------------------------|-------------------------|---------------------------|-------------------------|--|----------------------------|------------|-----------|-----------|-----------|
| PRESSURE | | PERFORMANCES | | | | COVERAGE | | | |
| P _w [bar] | P _A [bar] | Q _w [l/min] | Q _w [l/h] | Q _A [Nm ³ /h] | Q _A [NI/min] | α [deg] | A [mm] | B [mm] | C [mm] |
| 0,2 | 0,60 | 0,262 | 15,72 | 6,0 | 100,0 | 30 | 400 | 1900 | 215 |
| | 1,10 | | | 8,5 | 141,6 | 30 | 450 | 2200 | 240 |
| | 1,40 | | | 9,9 | 165,0 | 30 | 450 | 2500 | 240 |
| | 1,80 | | | 11,7 | 195,0 | 30 | 500 | 2900 | 255 |
| 0,3 | 0,70 | 0,318 | 19,08 | 6,5 | 108,3 | 30 | 400 | 2000 | 215 |
| | 1,40 | | | 9,9 | 165,0 | 30 | 450 | 2300 | 240 |
| | 1,80 | | | 11,7 | 195,0 | 30 | 500 | 2600 | 255 |
| | 2,10 | | | 13,0 | 216,6 | 30 | 500 | 3000 | 255 |
| 0,7 | 1,10 | 0,485 | 29,10 | 8,5 | 141,6 | 30 | 450 | 2100 | 240 |
| | 1,80 | | | 11,7 | 195,0 | 30 | 450 | 2300 | 240 |
| | 2,50 | | | 14,8 | 246,6 | 30 | 500 | 2700 | 255 |
| | 2,80 | | | 16,1 | 268,3 | 30 | 500 | 3200 | 255 |
| 1,5 | 2,50 | 0,701 | 42,06 | 14,8 | 246,6 | 30 | 450 | 3100 | 240 |
| | 3,20 | | | 17,7 | 295,0 | 30 | 450 | 3400 | 240 |
| | 3,90 | | | 21,1 | 351,6 | 30 | 500 | 3800 | 255 |
| | 4,20 | | | 22,4 | 373,3 | 30 | 500 | 4100 | 255 |
| 3,0 | 3,00 | 0,985 | 59,10 | 17,0 | 283,3 | 30 | 450 | 3500 | 240 |
| | 3,50 | | | 19,0 | 316,6 | 30 | 450 | 3900 | 240 |
| | 4,60 | | | 24,2 | 403,3 | 30 | 500 | 4500 | 255 |
| | 6,00 | | | 29,3 | 488,3 | 30 | 500 | 4800 | 255 |
| | 6,70 | | | 33,1 | 551,6 | 30 | 500 | 5200 | 255 |

| SUF 1239 Ln XMW 5004 An XMW 4061 | | | | | | | | | |
|-------------------------------------|-------------------------|---------------------------|-------------------------|--|----------------------------|------------|-----------|-----------|-----------|
| PRESSURE | | PERFORMANCES | | | | COVERAGE | | | |
| P _w [bar] | P _A [bar] | Q _w [l/min] | Q _w [l/h] | Q _A [Nm ³ /h] | Q _A [NI/min] | α [deg] | A [mm] | B [mm] | C [mm] |
| 0,2 | 0,70 | 0,644 | 38,64 | 6,5 | 108,3 | 30 | 400 | 1800 | 215 |
| | 1,10 | | | 8,5 | 141,6 | 30 | 450 | 2000 | 240 |
| | 1,40 | | | 9,9 | 165,0 | 30 | 450 | 2200 | 240 |
| | 1,80 | | | 11,7 | 295,0 | 30 | 500 | 2400 | 270 |
| 0,3 | 1,10 | 0,808 | 48,48 | 8,5 | 141,6 | 30 | 400 | 1900 | 215 |
| | 1,40 | | | 9,9 | 165,0 | 30 | 450 | 2100 | 240 |
| | 2,10 | | | 13,0 | 216,6 | 30 | 500 | 2300 | 270 |
| | 2,50 | | | 14,8 | 246,6 | 30 | 500 | 2500 | 270 |
| 0,7 | 1,80 | 1,210 | 72,60 | 11,7 | 295,0 | 30 | 450 | 2300 | 240 |
| | 2,10 | | | 13,0 | 216,6 | 30 | 450 | 2600 | 240 |
| | 2,80 | | | 16,1 | 268,3 | 30 | 500 | 2900 | 270 |
| | 3,20 | | | 17,7 | 295,0 | 30 | 500 | 3200 | 270 |
| 1,5 | 3,20 | 1,744 | 104,64 | 17,7 | 295,0 | 30 | 450 | 3300 | 240 |
| | 3,50 | | | 19,0 | 316,6 | 30 | 450 | 3500 | 240 |
| | 4,90 | | | 22,4 | 373,3 | 30 | 500 | 4400 | 270 |
| | 5,60 | | | 28,7 | 478,3 | 30 | 500 | 5400 | 270 |
| 3,0 | 3,00 | 2,398 | 143,88 | 17,0 | 283,3 | 30 | 450 | 4800 | 240 |
| | 5,30 | | | 26,8 | 446,6 | 30 | 450 | 5000 | 240 |
| | 6,00 | | | 29,3 | 488,3 | 30 | 500 | 5300 | 270 |
| | 6,70 | | | 33,1 | 551,6 | 30 | 500 | 5500 | 270 |
| | 7,00 | | | 34,0 | 556,6 | 30 | 500 | 5800 | 270 |

MW

STANDARD BODY

When atomizing higher quantities of liquid is required it is necessary to use larger size atomizer types. Atomizer design and coding follow the same scheme as smaller size types, with set-up codes and body/option codes. These atomizers offer the same spray patterns as the smaller models, with a capacity range from 32 to 1.158 liter per hour. The larger size body has two 1/2" inlets, and it is only available in the standard type with no air actuated spray control possible.






MWL 3316

X **Y** **Z**

CONNECTION


- G** = BSP Female (EU)
- N** = NPT Female (US)

OPTIONS

- A**  STANDARD
- B**  SHUT-OFF NEEDLE
- C**  CLEANING NEEDLE

MATERIALS

- B1** = AISI 303 Stainless steel
- B31** = AISI 316L Stainless steel
- T8** = Nickel plated brass

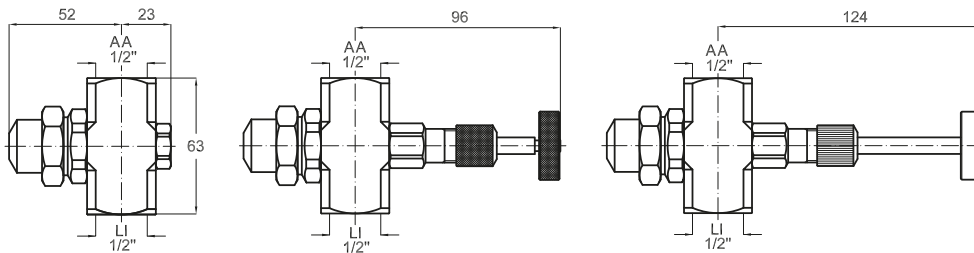


AA = air inlet (1/2" F)
LI = liquid inlet (1/2" F)

LARGER CAPACITIES


Larger capacities atomizers shown in these pages work on pressure and siphon liquid feed, and internal and external mix principles. A wide angle hollow cone spray is also available. Approximate jet dimensions are given in the table on the right of the page. Please note the larger dimensions for the complete atomizer, as given in the previous page.

MATERIALS B1 AISI 303 STAINLESS STEEL
 B31 AISI 316L STAINLESS STEEL
 D1 PVC
 T8 NICKEL PLATED BRASS



| SET-UP CODE | AIR PRESSURE (BAR) | | | | | | | | | | | | | | | | WH = Water capacity (l/hour) AM = Air capacity (NI/min) | | | |
|-----------------|--------------------|------|-----|-----|-----|-----|-----|-----|------|-----|-----|------|-----|-----|------|-----|--|------|-------|------------------------|
| | WH | | AM | | WH | | AM | | WH | | AM | | WH | | AM | | PA | PL | C | HM |
| SUL 3316 | - | - | - | - | - | - | 2,1 | 213 | 176 | 3,1 | 316 | 214 | 4,2 | 238 | 351 | 2,1 | 2 | 690 | 6700 | WIDE ANGLE ROUND SPRAY |
| Ln XMW 5201 | - | - | - | - | - | - | 2,3 | 127 | 249 | 3,2 | 195 | 292 | 4,3 | 154 | 439 | 3,2 | 3 | 690 | 7300 | |
| An XMW 4110 | - | - | - | - | - | - | - | - | - | 3,4 | 107 | 371 | 4,5 | 100 | 521 | 4,3 | 4 | 690 | 8500 | |
| SUL 3192 | 0,6 | 102 | 184 | 1,1 | 215 | 153 | 2,5 | 185 | 355 | 3,7 | 192 | 560 | 5,0 | 230 | 830 | 0,7 | 0,4 | 650 | 6100 | |
| | 0,7 | 57 | 230 | 1,3 | 124 | 230 | 2,7 | 146 | 410 | 3,9 | 150 | 620 | 5,3 | 158 | 940 | 1,3 | 1,0 | 670 | 7900 | |
| | 0,9 | 32 | 280 | 1,4 | 84 | 280 | 2,8 | 112 | 465 | 4,0 | 119 | 680 | 5,6 | 108 | 1080 | 2,8 | 2,0 | 650 | 6400 | |
| Ln XMW 5201 | - | - | - | 3,0 | 86 | 520 | 4,2 | 86 | 770 | - | - | - | - | - | - | 4,0 | 3,0 | 670 | 7300 | |
| An XMW 4111 | - | - | - | 3,1 | 65 | 580 | 4,6 | 51 | 910 | - | - | - | - | - | - | 5,3 | 4,0 | 690 | 8200 | |
| SUL 3300 | 0,7 | 129 | 325 | 1,7 | 182 | 540 | 3,1 | 265 | 810 | 4,3 | 350 | 1000 | - | - | - | 0,9 | 0,4 | 690 | 7900 | |
| | 0,9 | 82 | 370 | 1,8 | 143 | 590 | 3,2 | 215 | 860 | 4,6 | 260 | 1080 | - | - | - | 1,7 | 1,0 | 660 | 7300 | |
| | 1,0 | 45 | 415 | - | - | - | 3,4 | 173 | 910 | 5,0 | 186 | 1200 | - | - | - | 3,4 | 2,0 | 660 | 7000 | |
| Ln XMW 5201 | - | - | - | 3,5 | 136 | 950 | - | - | - | - | - | - | - | - | - | 4,6 | 3,0 | 690 | 8500 | |
| An XMW 4112 | - | - | - | 3,6 | 120 | 980 | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| SUM 3740 | 0,7 | 134 | 315 | 1,3 | 320 | 440 | 2,1 | 575 | 570 | 3,0 | 740 | 710 | 3,9 | 840 | 860 | 0,7 | 0,4 | 910 | 3400 | WIDE ANGLE ROUND SPRAY |
| | 0,9 | 100 | 380 | 1,4 | 255 | 520 | 2,2 | 505 | 640 | 3,1 | 690 | 770 | 4,1 | 790 | 930 | 1,4 | 1,0 | 910 | 4900 | |
| | - | - | - | 1,5 | 200 | 590 | 2,4 | 440 | 720 | 3,2 | 630 | 840 | 4,2 | 740 | 990 | 2,5 | 2,0 | 810 | 6100 | |
| | - | - | - | 1,7 | 154 | 670 | 2,5 | 380 | 790 | 3,4 | 570 | 910 | 4,4 | 690 | 1070 | 3,4 | 3,0 | 740 | 6700 | |
| | - | - | - | - | - | - | 2,7 | 330 | 860 | 3,5 | 520 | 980 | 4,5 | 650 | 1140 | 4,5 | 4,0 | 730 | 7600 | |
| | - | - | - | - | - | - | 2,8 | 275 | 930 | 3,7 | 470 | 1050 | 4,6 | 600 | 1210 | - | - | - | - | |
| | - | - | - | - | - | - | 3,0 | 235 | 1010 | 3,8 | 420 | 1120 | 4,8 | 550 | 1280 | - | - | - | - | |
| | - | - | - | - | - | - | 3,1 | 195 | 1080 | 3,9 | 345 | 1190 | 4,9 | 510 | 1350 | - | - | - | - | |
| | - | - | - | - | - | - | - | - | - | 4,1 | 325 | 1260 | 5,1 | 465 | 1430 | - | - | - | - | |
| Ln XMW 5202 | - | - | - | - | - | - | - | - | - | - | - | - | 5,2 | 425 | 1490 | - | - | - | - | |
| An XMW 4113 | - | - | - | - | - | - | - | - | - | - | - | - | 5,3 | 390 | 1560 | - | - | - | - | |
| | - | - | - | - | - | - | - | - | - | - | - | - | 5,5 | 350 | 1640 | - | - | - | - | |
| SUB 3230 | 1,3 | 34 | 350 | 1,7 | 146 | 365 | 3,0 | 230 | 510 | - | - | - | - | - | - | 1,4 | 0,4 | - | 6700 | ROUND SPRAY |
| | 1,4 | 25 | 390 | 1,8 | 121 | 395 | 3,1 | 200 | 550 | - | - | - | - | - | - | 2,0 | 1,0 | 250 | 7300 | |
| | 1,5 | 20 | 415 | 2,0 | 102 | 430 | 3,2 | 176 | 590 | - | - | - | - | - | - | 3,2 | 2,0 | - | 8200 | |
| | 1,7 | 15,5 | 445 | 2,1 | 86 | 460 | 3,4 | 154 | 620 | - | - | - | - | - | - | - | - | - | - | |
| Ln XMW 5201 | - | - | - | 2,3 | 72 | 490 | 3,5 | 135 | 660 | - | - | - | - | - | - | - | - | - | - | |
| An XMW 4101 | - | - | - | 2,4 | 60 | 520 | 3,6 | 118 | 700 | - | - | - | - | - | - | - | - | - | - | |
| SUB 3740 | 0,7 | 134 | 315 | 1,3 | 320 | 440 | 2,1 | 575 | 570 | 3,0 | 740 | 710 | 3,9 | 840 | 860 | 0,7 | 0,4 | 230 | 7000 | ROUND SPRAY |
| | 0,9 | 100 | 380 | 1,4 | 255 | 520 | 2,2 | 505 | 640 | 3,1 | 690 | 770 | 4,1 | 790 | 930 | 1,4 | 1,0 | 280 | 6400 | |
| | - | - | - | 1,5 | 200 | 590 | 2,4 | 440 | 720 | 3,2 | 630 | 840 | 4,2 | 740 | 990 | 2,5 | 2,0 | 250 | 11300 | |
| | - | - | - | 1,7 | 154 | 670 | 2,5 | 380 | 790 | 3,4 | 570 | 910 | 4,4 | 690 | 1070 | 3,4 | 3,0 | 250 | 12500 | |
| | - | - | - | - | - | - | 2,7 | 330 | 860 | 3,5 | 520 | 980 | 4,5 | 650 | 1140 | 4,5 | 4,0 | 250 | 14300 | |
| | - | - | - | - | - | - | 2,8 | 275 | 930 | 3,7 | 470 | 1050 | 4,6 | 600 | 1210 | - | - | - | - | |
| | - | - | - | - | - | - | 3,0 | 235 | 1010 | 3,8 | 420 | 1120 | 4,8 | 550 | 1280 | - | - | - | - | |
| | - | - | - | - | - | - | 3,1 | 195 | 1080 | 3,9 | 345 | 1190 | 4,9 | 510 | 1350 | - | - | - | - | |
| | - | - | - | - | - | - | - | - | - | 4,1 | 325 | 1260 | 5,1 | 465 | 1430 | - | - | - | - | |
| Ln XMW 5202 | - | - | - | - | - | - | - | - | - | - | - | - | 5,2 | 425 | 1490 | - | - | - | - | |
| An XMW 4102 | - | - | - | - | - | - | - | - | - | - | - | - | 5,3 | 390 | 1560 | - | - | - | - | |
| | - | - | - | - | - | - | - | - | - | - | - | - | 5,5 | 350 | 1640 | - | - | - | - | |
| SUM 3184 | - | - | - | 1,8 | 154 | 590 | 3,4 | 184 | 950 | - | - | - | - | - | - | 2,0 | 1,0 | 910 | 5800 | FLAT FAN SPRAY |
| | - | - | - | 2,0 | 119 | 640 | 3,5 | 157 | 1010 | - | - | - | - | - | - | 3,5 | 2,0 | 970 | 7000 | |
| Ln XMW 5201 | - | - | - | 2,1 | 93 | 690 | 3,7 | 133 | 1060 | - | - | - | - | - | - | - | - | - | - | |
| An XMW 4120 | - | - | - | - | - | - | 3,8 | 112 | 1110 | - | - | - | - | - | - | - | - | - | - | |
| SUQ 3740 | 0,7 | 134 | 315 | 1,3 | 320 | 440 | 2,1 | 575 | 570 | 3,0 | 740 | 710 | 3,9 | 840 | 860 | 0,7 | 0,4 | 1190 | 4000 | FLAT FAN SPRAY |
| | 0,9 | 100 | 380 | 1,4 | 255 | 520 | 2,2 | 505 | 640 | 3,1 | 690 | 770 | 4,1 | 790 | 930 | 1,4 | 1,0 | 2110 | 4600 | |
| | - | - | - | 1,5 | 200 | 590 | 2,4 | 440 | 720 | 3,2 | 630 | 840 | 4,2 | 740 | 990 | 2,5 | 2,0 | 2080 | 5200 | |
| | - | - | - | 1,7 | 154 | 670 | 2,5 | 380 | 790 | 3,4 | 570 | 910 | 4,4 | 690 | 1070 | 3,4 | 3,0 | 2160 | 5800 | |
| | - | - | - | - | - | - | 2,7 | 330 | 860 | 3,5 | 520 | 980 | 4,5 | 650 | 1140 | 4,5 | 4,0 | 2260 | 6400 | |
| | - | - | - | - | - | - | 2,8 | 275 | 930 | 3,7 | 470 | 1050 | 4,6 | 600 | 1210 | - | - | - | - | |
| | - | - | - | - | - | - | 3,0 | 235 | 1010 | 3,8 | 420 | 1120 | 4,8 | 550 | 1280 | - | - | - | - | |
| | - | - | - | - | - | - | 3,1 | 195 | 1080 | 3,9 | 345 | 1190 | 4,9 | 510 | 1350 | - | - | - | - | |
| | - | - | - | - | - | - | - | - | - | 4,1 | 325 | 1260 | 5,1 | 465 | 1430 | - | - | - | - | |
| Ln XMW 5202 | - | - | - | - | - | - | - | - | - | - | - | - | 5,2 | 425 | 1490 | - | - | - | - | |
| An XMW 4121 | - | - | - | - | - | - | - | - | - | - | - | - | 5,3 | 390 | 1560 | - | - | - | - | |
| | - | - | - | - | - | - | - | - | - | - | - | - | 5,5 | 350 | 1640 | - | - | - | - | |

0,35 1,0 2,0 3,0 4,0 Liquid pressure (bar)



OPTIONS AND ACCESSORIES

SINGLE AIR INLET (BODY OPTION U)

Air actuated atomizers can be supplied with a single air inlet for both the atomizing process and the air cylinder, which allows to operate a line of atomizers with only one air line and avoids air waste during the dead cycle times when atomizing is stopped. With this layout the liquid inside the set-up, at shut-off time, will be atomized with a low air/liquid ratio and large drops may be produced: this option may be used for long dead times in atomizing cycles when some large droplet may be tolerated and it is necessary to limit system investment cost.

Minimum working pressure 2 bar.



AUTOMATIC WITH LOCKING-NEEDLE SCREW

MX series atomizers can be automatic with a locking-needle screw. The utility consists in being able to manually close the needle, blocking the operation independently from the pressure of the driving air. This option is used to temporarily block one or more atomizers of a line without disturbing the working of the others.



XMW 1021 XX

SPECIAL MATERIALS AND COATINGS

Our engineering office is available to design, test and produce bodies, set-ups and complete systems according to the customer requirements. Special parts, bodies and systems which suit specific customer needs can be arranged under confidentiality agreements, supplied exclusively and not advertised.


SPECIAL DESIGN

Our engineering office is available to design, test and produce bodies, set-ups and complete systems according to the customer requirements. Special parts, bodies and systems which suit specific customer needs can be arranged under confidentiality agreements, supplied exclusively and not advertised.



ATOMIZER WALL MOUNTING


It is often convenient to mount atomizers through the wall of a tank or a duct for air treatment, keeping the atomizers and the feed lines on the outside for ease of maintenance. The following parts can serve this purpose for both MW standard atomizers and MX air actuated ones.



XMW 0021 XX

WALLS THICKER THAN 10 MM

A nipple XMW 0021 xx with an outer tapered thread 3/4" BSPT is recommended, with a corresponding passage in the wall threaded 3/4" straight thread.

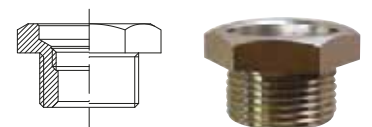


XMW 0020 XX

WALLS THINNER THAN 10 MM

For thin walls it is recommended to use a XMW 0020 xx nipple with a 3/4" straight thread, secured through the locknut VAC 0076 xx and the VDA 26A1 P7 seal. The above three parts can be ordered together with the assembly code XMW 0025 xx. A simple hole with 27 mm diameter is required into the wall.

XMW 0025 XX



VDA 26A1 P7

| | | |
|-----------|-----------------|-----------------------------|
| MATERIALS | NIPPLE, LOCKNUT | B1 AISI 303 STAINLESS STEEL |
| | | T8 NICKEL PLATED BRASS |
| | SEAL | P7 OIL PROOF SEAL MATERIAL |



VAC 0076 XX


UMR

PRESSURE TANKS


These tanks make it possible to produce atomized sprays in places where a liquid supply under pressure is not available. These tanks, once filled with the required liquid quantity, are put under pressure with the aid of compressed air and are then ready to serve as a source of liquid under pressure. Completely built out of high quality stainless steel, UMR tanks have the upper and bottom part protected by a rubber lining and are supplied complete of an air tight cover, pressure safety valve and, if required, quick connection nipples. The product codes in the following table are given for tanks with cover only, and for tanks with cover and connection nipples.

The maximum operation pressure is given for each type, according to PED norms, from a self-sticking label, see LP value in the table.

| | | |
|-----------|------------------|-----------------------------|
| MATERIALS | BODY | B2 AISI 304 STAINLESS STEEL |
| | BASE & HANDLES | E8 SYNTHETIC RUBBER (NBR) |
| | QUICK CONNECTION | RAPIDI E31 DELRIN ® |
| | O-RING | E0 EPDM |



| CODE COVER ONLY | COVER AND NIPPLES | CA liters | D mm | H mm | W kg | LP bar |
|--------------------|----------------------|--------------|---------|---------|---------|-----------|
| UMR 0090 B2 | UMR C090 B2 | 9 | 232 | 340 | 3,7 | 4,9 |
| UMR 0190 B2 | UMR C190 B2 | 18 | 219 | 630 | 4,3 | 4,9 |




SPECIAL ATOMIZERS

In many industries, such as in metals industry or chemical industry, bi-phase water-air atomizers are mainly, but not only, used to suppress and cool fumes. In these situations, it is very important to have products that give a homogenous distribution of the nebulized jet that interact with the gaseous phase, and to have the possibility to work with a wide range of pressures, both for water and air.

PNR Italia 50-years' experience allows to find different solutions for the difficult problems the company has faced for its clients, and in this page you can find some special atomizers that have been created, with a special attention to their industrial applications.

MF

In many industrial processes requiring gas cooling, fumes suppression or the injection of chemicals, it is necessary to use suitable air atomizing nozzles. PNR bi-phase nozzles MF series are products specifically designed to improve the efficiency of the manufacturing processes with a reduced energy consumption and a low clogging risk. The special geometry of the MF air atomizing nozzles provides a uniform spray pattern and small droplets.



MF

MN, MO

The MN series atomizers are normally used to cool blooms and billets. They have a full cone spray pattern and a mounting system to the support plates through two pins and O-rings in Viton. They can be supplied with 1/4" or 3/8" female liquid/air connections upon request. All MN atomizers are supplied with a capacity/pressure chart so to be able to adjust the pumps to the capacities required by the plant.

The MO atomizers with oval spray coverage are normally used to cool blooms and billets. They have a fastening system to lock them on the supporting plates through two pins and O-ring in Viton. On request they can be supplied with 1/4" or 3/8" female liquid/air connections upon request. All MO atomizers are supplied with a capacity/pressure chart in order to adjust the pumps to the capacities required for the plant.



MN




MO

MB, MT

In continuous casting, and in slab casting in particular, lance atomizers replace conventional compact atomizers, currently called block atomizers, where the atomizer body is equipped with an extension and the spray tip is located at the exit end of the extension. The reasons of this replacement are due either to the geometrical need to insert the spraying pipe between rolls, whose clearance is often very small and prevents the use of block atomizers, or to the convenience to position the feeding pipes far from the intensely heated area near the slabs.

Lance atomizers can be classified according to different parameters:

- *Atomizer's body*: the body where atomization is generated is matched by a plug-in connection to fluid feeding ducts, may have different shapes according to the model and may be casted or machined.
- *Geometry of the pipe*: straight pipe, or bent type
- *Connections of the pipe to the body*: the extension pipe is welded onto the block body, or the extension pipe is screwed to the block body with a locknut.

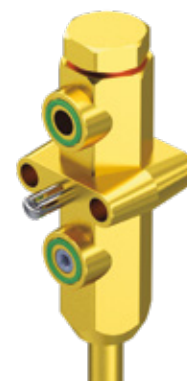

MB



MT

RX - RW - RZ

RX and RZ hollow cone nozzle delivers a very finely atomized hollow cone spray, even at low pressure values. They contain a precisely machined insert with narrow passages that can be easily disassembled for cleaning in case of obstruction. Clogging can be avoided placing a fine mesh strainer on the main manifold or using an individual filter.


RW atomizers works in the same way, but the nozzle is mounted on the pipe by means of a welded nipple ZAA and a locknut VAA.

THREAD SPECIFICATION:
BSPT, NPT, nipple and locknut


TYPICAL APPLICATIONS:
dust control, humidification, deodorant spray, disinfectant liquid spray, exhaust scrubbers.

SUGGESTED FILTERS:


We suggest to use a threaded filter VEF to protect the nozzle against clogging. You can choose between 50, 75 or 100 mesh.

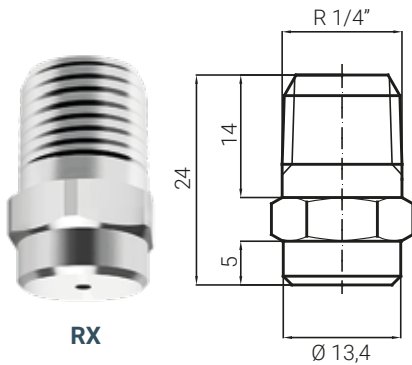

RX

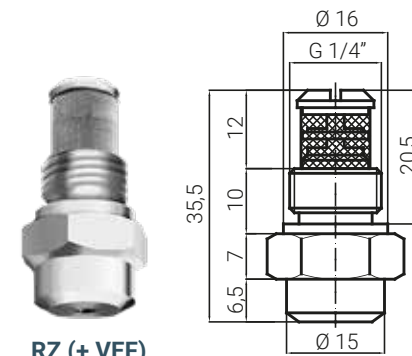

RZ (+ VEF)

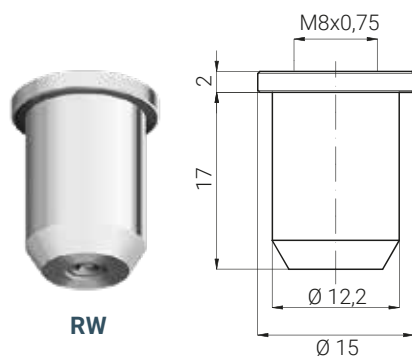

RW


| CODE | D mm | Capacity at different pressure values | | | | | | | | | | l/ora bar |
|------------------------|------|---------------------------------------|------|------|------|------|------|------|------|------|------|-----------|
| | | 1.5 | 2.0 | 3.0 | 4.0 | 5.0 | 6.0 | 10 | 15 | 20 | 50 | |
| 80° RXT 0060 xx | 0.50 | | 2.94 | 3.60 | 4.16 | 4.65 | 5.09 | 6.57 | 8.05 | 9.30 | 14.7 | |
| RXT 0100 xx | 0.50 | | 4.90 | 6.00 | 6.93 | 7.75 | 8.49 | 11.0 | 13.4 | 15.5 | 24.5 | |
| RXT 0130 xx | 0.70 | 5.52 | 6.37 | 7.80 | 9.01 | 10.1 | 11.0 | 14.2 | 17.4 | 20.1 | 31.8 | |
| RXT 0190 xx | 0.70 | 8.06 | 9.31 | 11.4 | 13.2 | 14.7 | 16.1 | 20.8 | 25.5 | 29.4 | 46.5 | |
| RXT 0250 xx | 1.00 | 10.6 | 12.2 | 15.0 | 17.3 | 19.4 | 21.2 | 27.4 | 33.5 | 38.7 | 61.2 | |
| RXT 0380 xx | 1.00 | 16.1 | 18.6 | 22.8 | 26.3 | 29.4 | 32.2 | 41.6 | 51.0 | 58.9 | 93.1 | |
| RXT 0510 xx | 1.50 | 21.6 | 25.0 | 30.6 | 35.3 | 39.5 | 43.3 | 55.9 | 68.4 | 79.0 | 125 | |
| RXT 0650 xx | 1.60 | 27.6 | 31.8 | 39.0 | 45.0 | 50.3 | 55.2 | 71.2 | 87.2 | 101 | 159 | |
| RXT 0780 xx | 1.90 | 33.1 | 38.2 | 46.8 | 54.0 | 60.4 | 66.2 | 85.4 | 105 | 121 | 191 | |
| RXT 0910 xx | 1.90 | 38.6 | 44.6 | 54.6 | 63.0 | 70.5 | 77.2 | 99.7 | 122 | 141 | 223 | |
| RXT 1116 xx | 1.90 | 49.2 | 56.8 | 69.6 | 80.4 | 89.9 | 98.4 | 127 | 156 | 180 | 284 | |
| RXT 1143 xx | 1.90 | 60.7 | 70.1 | 85.8 | 99.1 | 111 | 121 | 157 | 192 | 222 | 350 | |
| RXT 1166 xx | 2.20 | 70.4 | 81.3 | 99.6 | 115 | 129 | 141 | 182 | 223 | 257 | 407 | |

| CODE | D mm | Capacity at different pressure values | | | | | | | | | | l/min bar |
|------------------------|------|---------------------------------------|------|------|------|------|------|------|------|------|------|-----------|
| | | 1.5 | 2.0 | 3.0 | 4.0 | 5.0 | 6.0 | 10 | 15 | 20 | 50 | |
| 60° RZQ 0080 xx | 0.45 | | 0.07 | 0.08 | 0.09 | 0.10 | 0.11 | 0.15 | 0.18 | 0.21 | 0.33 | |
| RZQ 0120 xx | 0.55 | | 0.10 | 0.12 | 0.14 | 0.15 | 0.17 | 0.22 | 0.27 | 0.31 | 0.49 | |
| RZQ 0250 xx | 0.80 | 0.18 | 0.20 | 0.25 | 0.29 | 0.32 | 0.35 | 0.46 | 0.56 | 0.65 | 1.02 | |
| RZQ 0390 xx | 1.00 | 0.28 | 0.32 | 0.39 | 0.45 | 0.50 | 0.55 | 0.71 | 0.87 | 1.01 | 1.59 | |
| RZQ 0560 xx | 1.20 | 0.40 | 0.46 | 0.56 | 0.65 | 0.72 | 0.79 | 1.02 | 1.25 | 1.45 | 2.29 | |
| RZQ 0780 xx | 1.40 | 0.55 | 0.64 | 0.78 | 0.90 | 1.01 | 1.10 | 1.42 | 1.74 | 2.01 | 3.18 | |
| RZQ 1100 xx | 1.60 | 0.71 | 0.82 | 1.00 | 1.15 | 1.29 | 1.41 | 1.83 | 2.24 | 2.58 | 4.08 | |
| RZQ 1140 xx | 1.90 | 0.99 | 1.14 | 1.40 | 1.62 | 1.81 | 1.98 | 2.56 | 3.13 | 3.61 | 5.72 | |
| RZQ 1170 xx | 2.10 | 1.20 | 1.39 | 1.70 | 1.96 | 2.19 | 2.40 | 3.10 | 3.80 | 4.39 | 6.94 | |
| RZQ 1200 xx | 2.30 | 1.41 | 1.63 | 2.00 | 2.31 | 2.58 | 2.83 | 3.65 | 4.47 | 5.16 | 8.16 | |

RW capacities are the same as RX nozzle. To have the complete product code, you just have to change "RX" with "RW".

The last two letters ("xx") indicate the material, and must be changed with one of the following:
B1 = AISI 303 Stainless steel
B31 = AISI 316L Stainless steel
T1 = Brass

RS

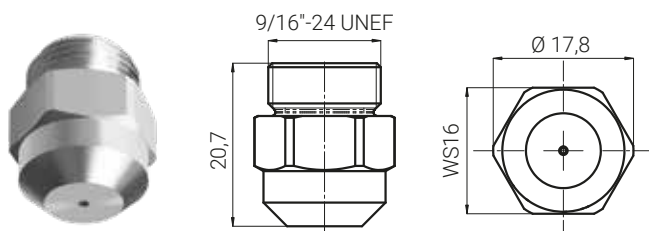

RS nozzle series are designed to atomize water in high pressure and produce a very fine water mist spray. The nozzles are suitable for applications such as humidification and dust suppression.

THREAD SPECIFICATION:
Male 9/16" - 24 UNEF

TYPICAL APPLICATIONS:
humidification, dust suppression.

ABBREVIATION LIST

| | | | | | | | | |
|-----------|---------------------|----------|-----------|--------------------------|--------|-----------|------------------------|--------|
| AH | Air capacity | Nmc/hour | CA | Internal volume | liters | LP | Max operation pressure | bar |
| AM | Air capacity | NI/min | CH | Wrench size | mm | PA | Air pressure | bar |
| AA | Atomizing air inlet | inch | HM | Maximum spray throw | mm | PL | Liquid pressure | bar |
| AC | Cylinder air inle | inch | HR | Length of coherent spray | mm | WH | Water capacity | l/hour |
| An | Air nozzle code | -- | LI | Liquid inlet size | inch | WM | Water capacity | l/min |
| C | Spray width | mm | Ln | Liquid nozzle code | -- | | | |

DISCLAIMER

Our products are manufactured with the best care and according to the latest developments of the technology available. However we cannot assure that every one of our products is perfectly fit for every specific application. The information in this catalogue is provided "as seen" and so we offer no warranty of any kind with respect to the subject matter or accuracy of the information contained herein. This publication may include technical inaccuracies or typographical errors and changes may be periodically made to the information herein without prior notice.

As a result of continuous product improvement our documentation is regularly updated: please visit our website www.pnr.eu to be always updated.

PRODUCT WARRANTY

PNR Italia products shall be replaced and/or repaired at PNR Italia's discretion free of charge if they are found to be genuinely non-compliant due to manufacturing or packaging defects or incorrect labelling. The conformity guarantee shall only apply if PNR Italia receives written notice of non-conformity from the customer within 30 days from the date of installation of the product or within one year from the date of shipment. The cost of repair or the cost of replacing the product with an identical or equivalent product shall be the entire responsibility of PNR Italia and the exclusive remedy of the purchaser for any breach of warranty and PNR Italia shall not be liable for any personal injury or loss resulting from product malfunction.

This warranty does not cover problems or damage resulting if our products are improperly stored, assembled, or installed, used for a purpose other than that for which they were intended, tampered with, or used in a manner inconsistent with the instructions for the product such as, but not limited to:

- Operation at pressures higher than those indicated in the performance table published in the catalogue or product data sheet,
- operation with or exposure to fluids containing abrasive particles that can cause erosive wear,
- operation with or exposure to fluids that cause chemical aggression on the nozzle's material of construction,
- mechanical damage to the orifices, nipple or nozzle body caused by improper handling or assembly.

In all of the above cases, the customer must accept a reduction in the product's lifecycle or performance inferior to that declared in the catalogue by PNR Italia. Warranty claims shall be addressed directly to PNR Italia by drawing up a precautionary report or complaint on the conformity defect detected, which must be forwarded by email to: quality@pnr.it.

RETURN PROCEDURE

PNR Italia verifies and ascertains that the product which is the subject of the claim is actually covered by the established warranty period and communicates this in writing to the customer;

The customer shall apply in writing to PNR Italia for authorisation to return the product;

PNR Italia authorises the customer in writing to return the product, which must be returned by the customer in its original packaging the product which is the subject of the complaint must be returned in a manner that PNR Italia will communicate to the customer in writing and the transport costs of the returned goods shall be borne entirely by PNR Italia.

PNR Italia may, at its discretion, use new, refurbished or used parts in good working order to repair the product.

No salesperson, agent or employee of PNR Italia is authorised to make any modification, extension or addition to this Guarantee.

PNR Italia guarantees the best spray quality and accuracy of flow values, with a tolerance of 10% on the flow rate and $\pm 5^\circ$ on the spray angle. Specific cases with smaller tolerances can be considered on a case-by-case basis.

COPYRIGHT

All the contents (texts, images, graphics, layouts, etc.) of this document are property of PNR Italia Srl. Any redistribution or reproduction of part or all of the contents in any form is prohibited.




AZIENDA CON
SISTEMA DI GESTIONE
CERTIFICATO DA DNV
ISO 9001 - ISO 14001
ISO 45001

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV

ISO 9001
ISO 14001
ISO 45001

A GLOBAL PRESENCE ALL OVER THE WORLD.

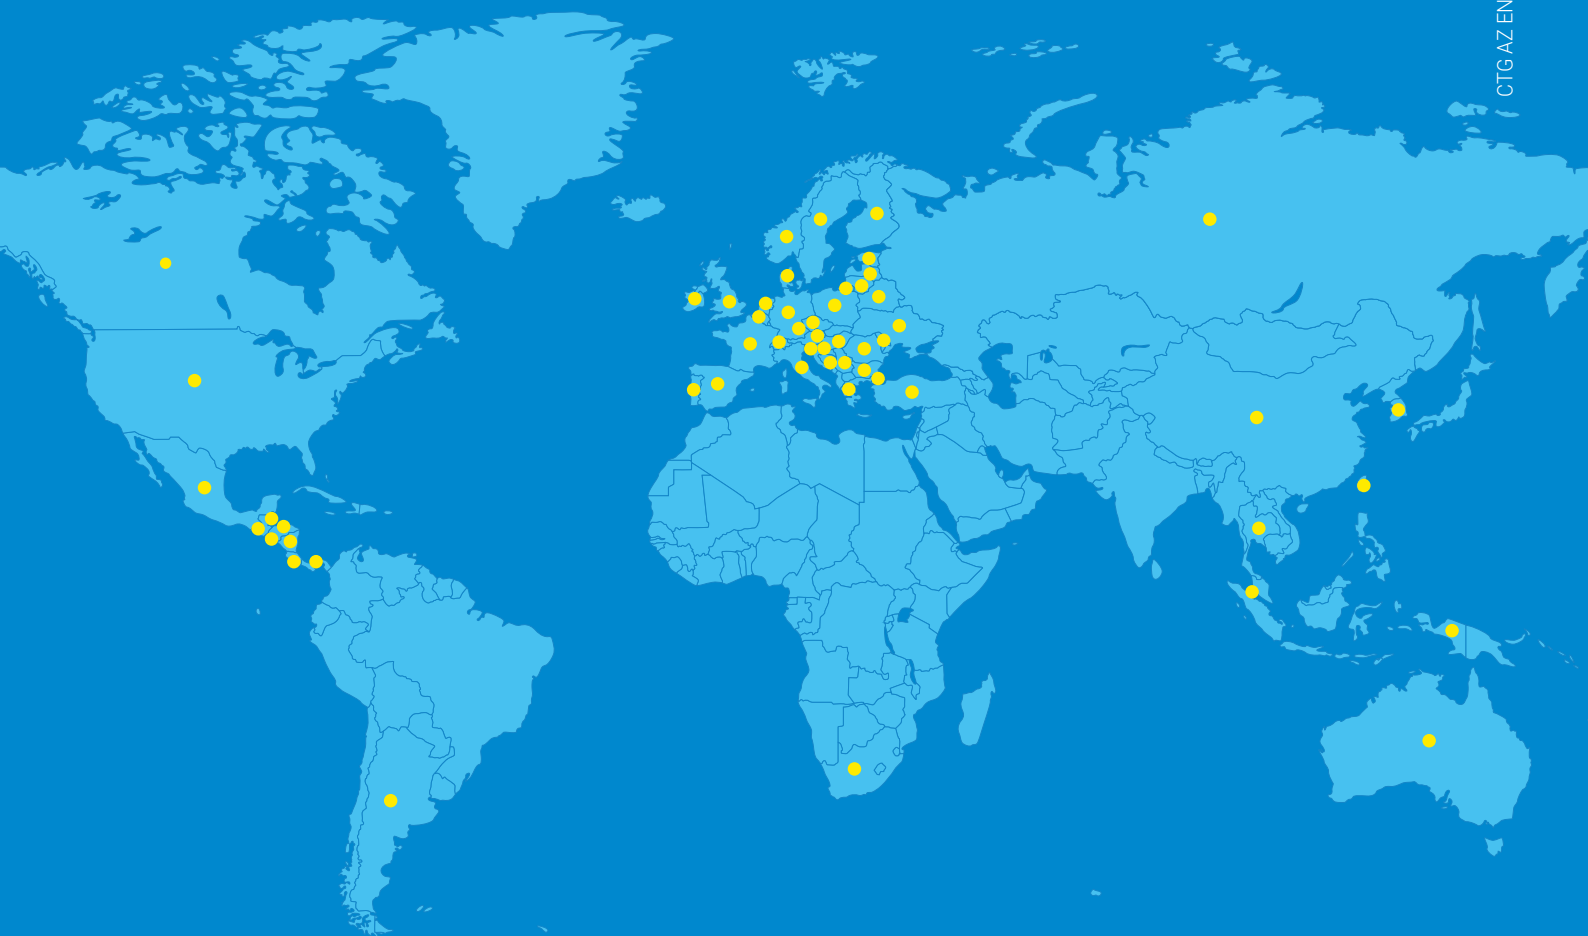

CTGAZ EN - REV.24.03 - ©PNR Italia, all rights reserved



PNR ITALIA srl - Socio Unico

Via Gandini 2, 27058 Voghera (PV) Italy
For more information, visit www.pnr.eu

Call or write us for customized solutions!

☎ +39 0383 344 611 ✉ info@pnr.it

